

Product End-of-Life Disassembly Instructions

Product Category: Networking Equipment

Marketing Name / Model

[List multiple models if applicable.]

ProCurve Switch fl Redundant Management Module J8731A

ProCurve Switch fl 1-Port 10 GbE LR Interface Mod J8733A

ProCurve Switch fl 10-Port Mini-GBIC Interface Mod J8734A

ProCurve Switch fl 10-Port 100/1000-T Interface Mod J8735A

ProCurve Switch fl 1-Port 10 GbE X2 Interface Module J8736A

Purpose: The document is intended for use by end-of-life recyclers or treatment facilities. It provides the basic instructions for the disassembly of HP products to remove components and materials requiring selective treatment, as defined by EU directive 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE).

1.0 Items Requiring Selective Treatment

1.1 Items listed below are classified as requiring selective treatment.

1.2 Enter the quantity of items contained within the product which require selective treatment in the right column, as applicable.

Item Description	Notes	Quantity of items included in product
Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA)	With a surface greater than 10 sq cm 1 in product,	1
Batteries	All types including standard alkaline and lithium coin or button style batteries	0
Mercury-containing components	For example, mercury in lamps, display backlights, scanner lamps, switches, batteries	0
Liquid Crystal Displays (LCD) with a surface greater than 100 sq cm	Includes background illuminated displays with gas discharge lamps	0
Cathode Ray Tubes (CRT)		0
Capacitors / condensers (Containing PCB/PCT)		0
Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height		0
External electrical cables and cords		0
Gas Discharge Lamps		0
Plastics containing Brominated Flame Retardants		0
Components and parts containing toner and ink, including liquids, semi-liquids (gel/paste) and toner	Include the cartridges, print heads, tubes, vent chambers, and service stations.	0
Components and waste containing asbestos		0
Components, parts and materials containing refractory ceramic fibers		0
Components, parts and materials containing radioactive substances		0

2.0 Tools Required

List the type and size of the tools that would typically be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description	Tool Size (if applicable)
Philips Head Screw Driver	# 2


3.0 Product Disassembly Process

3.1 List the basic steps that should typically be followed to remove components and materials requiring selective treatment:


1. Remove the CF flash & the DIMM from the CF & DIMM holder. This is applicable for Product J8731A only. Refer to Picture 1 for more details.
2. Remove the SC cables connecting the transponder as well as the clip holding the cables onto the PCA. This is only applicable for Product J8733A. Refer to Picture 5 for more details
3. Remove the rear bracket by unscrewing 2 of screws on the top and 2 screws on the bottom of the bracket. Refer to Picture 2 for more details.
4. Separate the rear bracket from the PCA.
5. Remove the screws securing the bulkhead to PCA using a Philips Head screw driver.
6. Remove the EMI gasket from the top (1 per) and the side (2 per) of the bulkhead. Refer to Picture 3 for more details.
7. Remove the screws securing the clip to heat sink using a Philips screw driver. Refer Picture 4 for more details
8. Separate the clip & standoff the heat sink.
9. Remove the screws securing the guide pins to the PCA using a Philips screw driver. See Picture 2 for more details.
10. Separate the guide pins, heat sink, clip, standoff, EMI gasket, PCA and bulkhead
- 11.
- 12.
13. .
- 14.
- 15.
- 16.
- 17.
- 18.
- 19.

3.2 Optional Graphic. If the disassembly process is complex, insert a graphic illustration below to identify the items contained in the product that require selective treatment (with descriptions and arrows identifying locations).


Picture 1

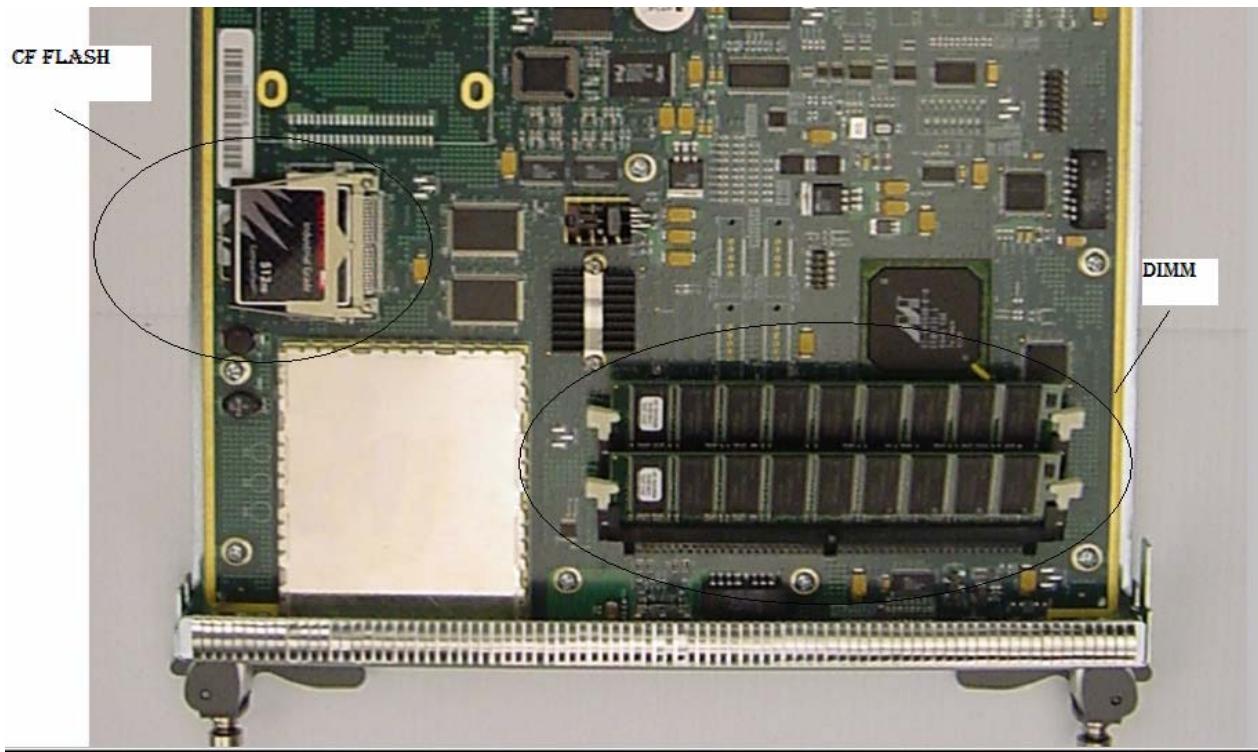


Picture 2

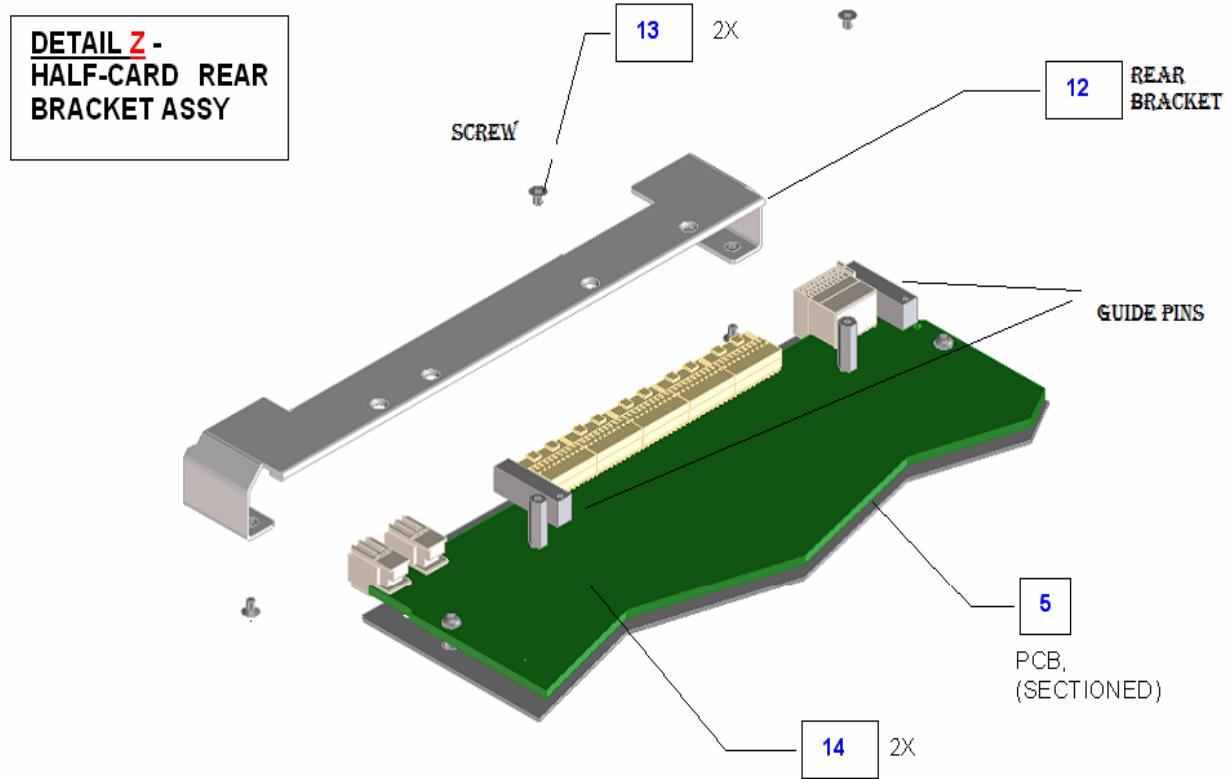

Picture 3

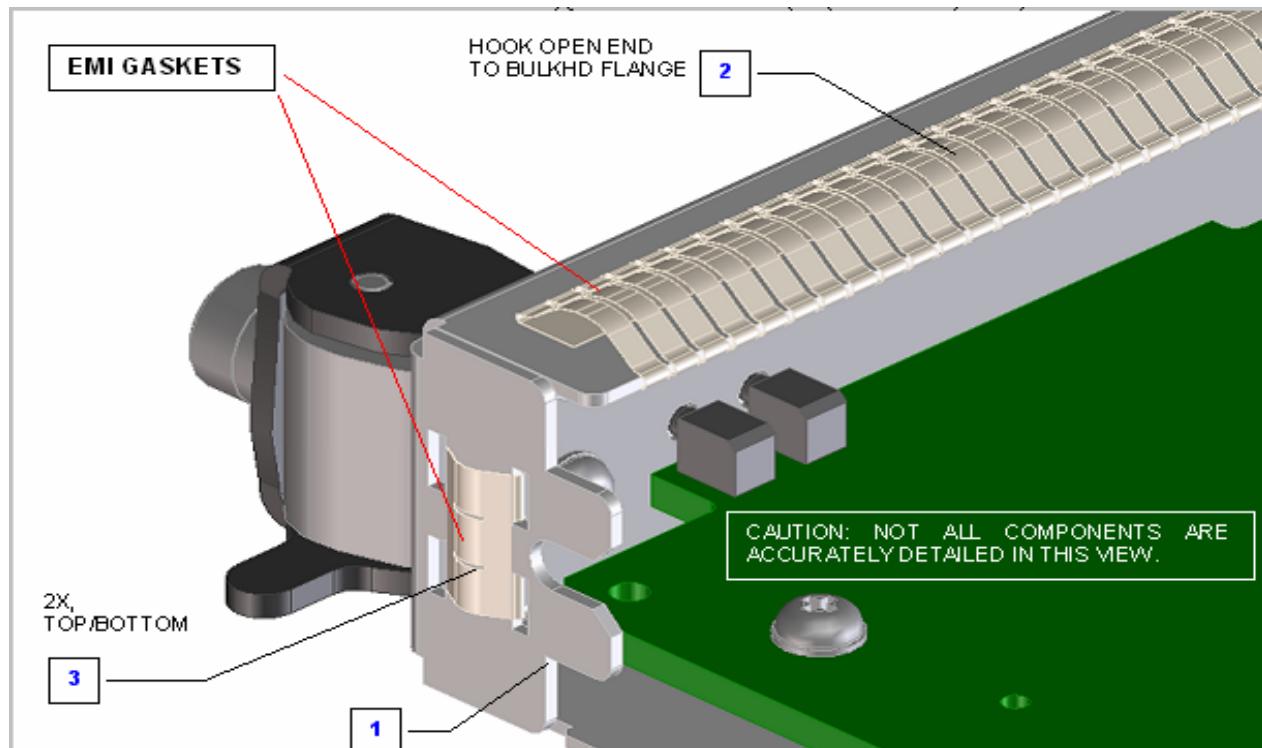

Picture 4

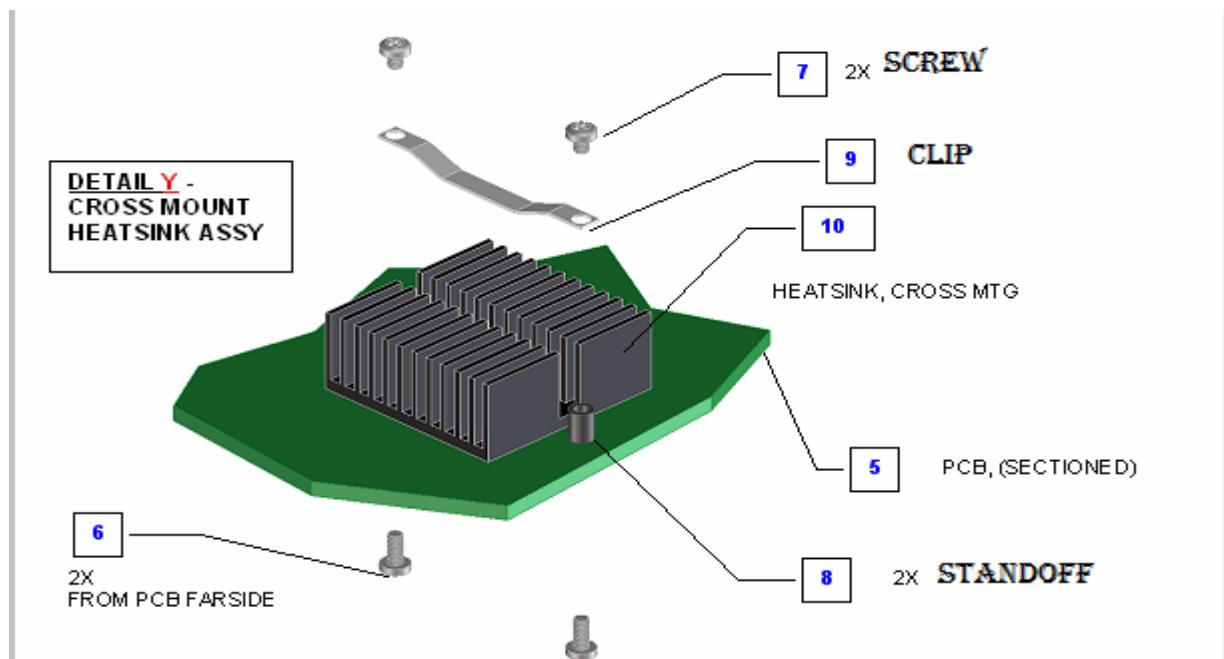

Picture 5

