



# Product End-of-Life Disassembly Instructions

Product Category: Networking Equipment

Marketing Name / Model

[List multiple models if applicable.]

HPE MSR958 1GbE and Combo PoE Router(JH301A)

**Purpose:** The document is intended for use by end-of-life recyclers or treatment facilities. It provides the basic instructions for the disassembly of HP products to remove components and materials requiring selective treatment, as defined by EU directive 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE).

## 1.0 Items Requiring Selective Treatment

1.1 Items listed below are classified as requiring selective treatment.

1.2 Enter the quantity of items contained within the product which require selective treatment in the right column, as applicable.

Item Description	Notes	Quantity of items included in product
Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA)	With a surface greater than 10 sqcm	3
Batteries	All types including standard alkaline and lithium coin or button style batteries	0
Mercury-containing components	For example, mercury in lamps, display backlights, scanner lamps, switches, batteries	0
Liquid Crystal Displays (LCD) with a surface greater than 100 sq cm	Includes background illuminated displays with gas discharge lamps	0
Cathode Ray Tubes (CRT)		0
Capacitors / condensers (Containing PCB/PCT)		0
Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height		0
External electrical cables and cords		1
Gas Discharge Lamps		0
Plastics containing Brominated Flame Retardants weighing > 25 grams (not including PCBs or PCAs already listed as a separate item above)		0
Components and parts containing toner and ink, including liquids, semi-liquids (gel/paste) and toner	Include the cartridges, print heads, tubes, vent chambers, and service stations.	0
Components and waste containing asbestos		0
Components, parts and materials containing refractory ceramic fibers		0
Components, parts and materials containing radioactive substances		0

## 2.0 Tools Required

List the type and size of the tools that would typically be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description	Tool Size (if applicable)
Screw driver	2#

## 3.0 Product Disassembly Process

3.1 List the basic steps that should typically be followed to remove components and materials requiring selective treatment:

1. Unscrew the screws on mounting angle 0, and then remove mounting angle 0.
2. Unscrew the screws on SD splinter, and then remove SD splinter.
3. Remove the cover 3.
- 4.
5. Unscrew the screws on PCB 10, and then remove PCB 10.
6. Unscrew the screws on PCB 13, and then remove PCB 13.
7. Unscrew the screws on PCB 12, and then remove PCB 12.
8. Unscrew the screws on PCB 11, and then remove PCB 11.
9. Remove panel 8, insulate plate 7,8 and outlet 6.
10. Remove all of labels.

3.2 Optional Graphic. If the disassembly process is complex, insert a graphic illustration below to identify the items contained in the product that require selective treatment (with descriptions and arrows identifying location)

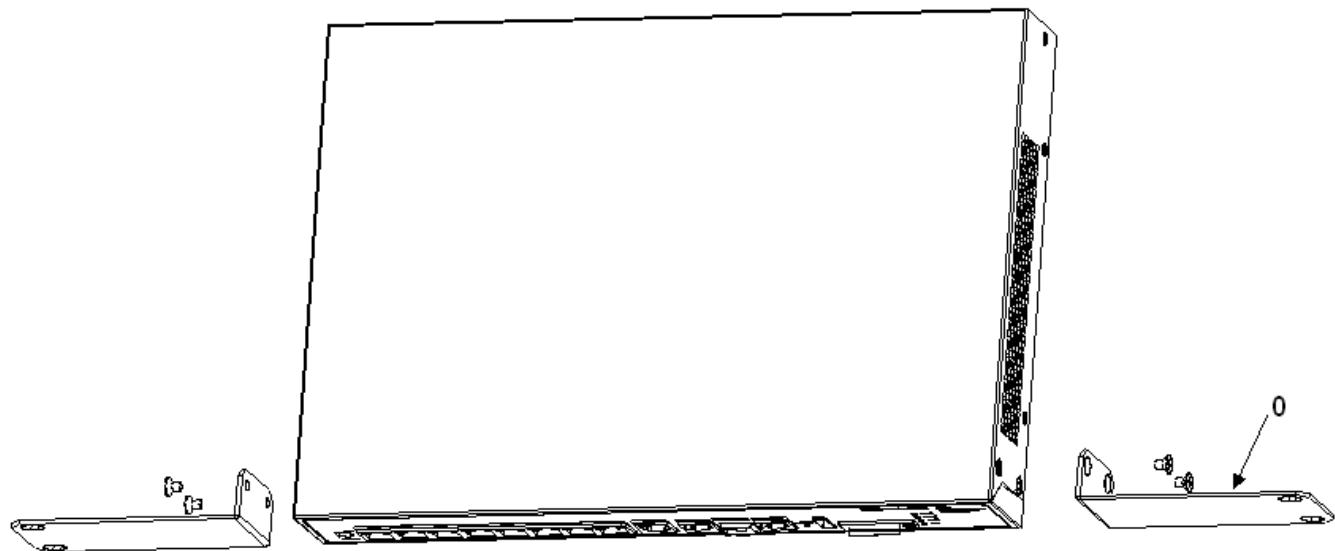


Figure1 Remove mounting angle

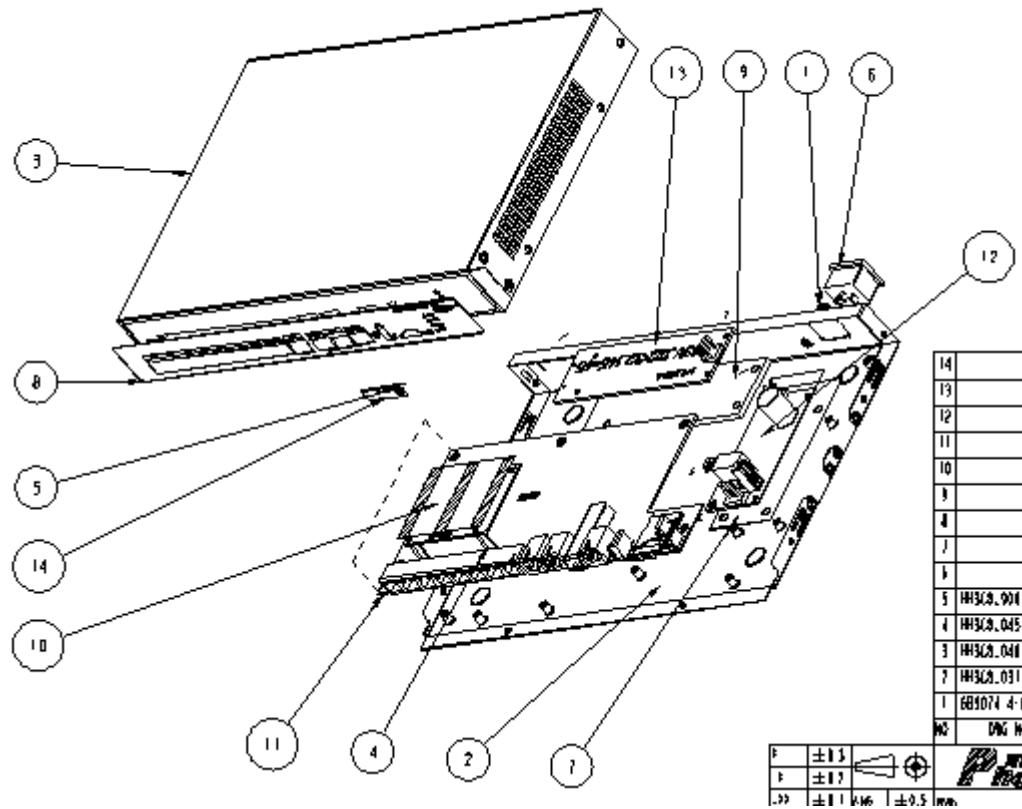


Figure2Treatment to the product

### 3.3 Material of the facility built

Facility	Components	Material	Weight(g)	Weight percentage	Selective treatment for materials and components	Details
0		FE	65	3.05%		Fe recycling
1		FE	2	0.09%		
2		FE	600	28.17%	Containing brominated flame retardants	Fe recycling
3		FE	695	32.63%	Containing brominated flame retardants	Fe recycling
4		FE	5	0.23%		
5		FE	2	0.09%	Containing brominated flame retardants	
6		PC	15	0.7%	Containing brominated flame retardants	
7		PC	295	13.85%	Containing brominated flame retardants	
8		PC	5	0.23%	Containing brominated flame retardants	
9		PC	75	3.52%	Containing brominated flame retardants	
10		Complex PCB	30	1.41%	The surface of PCB is greater than 10 square centimeters	
11		Complex PCB	295	13.85%	The surface of PCB is greater than 10 square centimeters	
12		Complex PCB	105	4.93%	The surface of PCB is greater than 10 square centimeters	
13		Complex PCB	230	10.8%	The surface of PCB is greater than 10 square centimeters	
14		FE	4	0.19%	Containing brominated flame retardants	Fe recycling

### 4. Revised record

Date	Version	Author	Modify content
2015.12.16	V0	Liujie	Initial version