

### MODELS

#### *Compaq MP2800 Microportable Projector*

180228-001 – North America

180228-011 – Australia, New Zealand

180228-021 – Europe

180228-AA1 – China


180228-031 – UK

180228-191 – Japan

180228-B24 – International

#### *Option Part Numbers*

215464-001 – Lamp

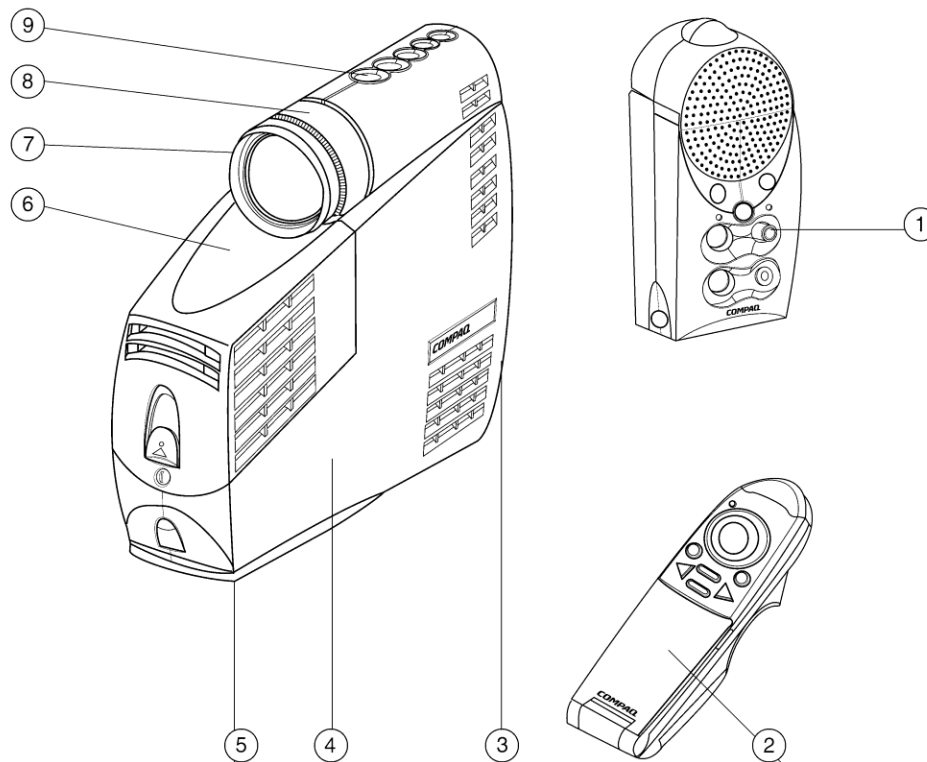

1. Multimedia Adapter with integrated 8 Watt Premier Sound speaker
2. Full featured remote control with remote mouse and laser pointer
3. Power cord connector
4. Rugged magnesium casing

5. Stability Foot
6. Easily removable lamp module
7. Focus Adjustment
8. Integrated zoom lens
9. Standby and Onscreen display (OSD) menu buttons

# COMPAQ

### AT A GLANCE

- 3 lbs (1.4 kg)/118 cubic inches (1937 cubic centimeters)
- 1100 ANSI, 1500 peak lumens
- Texas Instruments DLP technology
- Native XGA resolution
- Integrated zoom lens
- Multimedia adapter and remote control
- Two-year worldwide limited warranty

### SPECIFICATIONS

<b>Brightness</b>	1100 ANSI, 1500 peak lumens	
<b>Portability</b>	General	Fits in existing notebook carrying case along with notebook computer. Additional traveling case also included.
	Size/Volume (HxWxD)	7.11 x 2.71 x 8.71 in and 118 cubic in/ 18.06 x 6.89 x 22.13 cm and 1937 cubic cm
	Weight	3 lbs/1.36 kg
	Casing	Magnesium (Stronger than plastics; 30% lighter than aluminum)
<b>Display Resolution</b>	Displays native XGA (1024 x 768) resolution but will automatically scale up from VGA and SVGA or down from SXGA to fill screen. Will also scale from Macintosh 832 x 624 compatible.	
<b>Image Quality</b>	Technology	Texas Instruments Digital Light Processing (DLP) technology
	Contrast	400:1 contrast full-on; 150:1 checkerboard
	Color	SMPTE-C, 24 bit, 16.7M
	White Point	8000° Kelvin
	Uniformity	70%
	Plug and Play	Yes
<b>Lens</b>	Type	Adjustable Focal Length Zoom lens (1.2x) and manual adjustable focus
	Throw Ration (D/W)	2.0:1 – 2.4:1
	Lens Height	6in/15.18 cm
	Throw distance	3.74 to 32.8 feet/114 to 1000 cm
	Offset	128% of image above centerline
	Focus	Manual focus via focus ring around lens
	Keystoning	Digital keystone correction
	<b>Connectivity</b>	Signal Interface
User Interface		Standard Compaq 3 button OSD (includes zoom and keystone correction), Power and Resynch
Standards Supported		VGA and DVI
USB Capabilities		8-pin to USB/RS-232 cable included with Multimedia Adapter for remote mouse functions Supports VGA, SVGA, XGA and SXGA resolutions
<b>Approvals/Certifications</b>	CE	Yes
	C.I.S.P.R.	Yes
	VDE / TUV	Yes
	UL Approval	Yes
	FCC Class B Approval	Yes
<b>Multimedia Adapter</b>	Yes	
<b>Remote Control</b>	Yes	
<b>On-Screen Controls</b>	Yes	

### SPECIFICATIONS *(continued)*

<b>Language Selection</b>	English	Yes
	German	Yes
	French	Yes
	Spanish	Yes
	Italian	Yes
	Dutch	Yes
	Japanese	Yes
	Chinese	Yes
<b>User Controls</b>	Brightness, Contrast	Yes
	Positioning	Yes
	Keystone Correction	Yes
	Digital Zoom	Yes
	Clock	Yes
	Clock Phase	Yes
	Color Temperature	Yes
	Picture Control	Yes
	HDTV Settings	Yes
	Menu Location Control	Yes
	Power Saver	Yes
	Lamp Hours	Yes
	Lamp Hours Reset	Yes
	Standby Lamp Delay	Yes
Serial Number	Yes	
Master Reset	Yes	
Image Control (upside down, reverse, upside down and reversed)	Yes	
<b>Tilt Feature</b>	Up to 10 degrees	
<b>Horizontal Frequency</b>	31.5 to 80 kHz for analog signals and 31.5 to 60 kHz for digital signals	
<b>Vertical Frequency</b>	48 to 85 Hz for analog signals and 48 to 85 Hz for digital signals	
<b>Power Consumption</b>	5 Watts (standby)/185 Watts (full power)	
<b>Operating Temperature</b>	50° to 104°F/10° to 40°C	
<b>Operating Humidity</b>	20% to 80%	
<b>Video</b>	Projector is capable of displaying video from a VGA or DVI source (example: DVD on Portable PC). Video and S-Video capability (from DVD, Camcorder, or VCR) through the included multimedia adapter	
<b>HDTV Support</b>	720p, 1080i	
<b>Audio</b>	Multimedia adapter has integrated 8-watt Premier•Sound speaker system.	
<b>Power supply</b>	90V to 255V (auto switching); warm restrike after 45 seconds	
<b>Lamp/Module</b>	User Replaceable	
<b>Warranty</b>	The MP2800 projector comes with a two-year worldwide limited warranty. In North America, Europe and Asia Pacific, the Advanced Unit Replacement program offers a new or "like new" replacement of a defective unit in 48 hours during the two-year warranty period. In all other regions, a replacement is available by mail-in. There is a 90-day standard bulb warranty. Within the bulb warranty period, defective bulbs will be replaced via overnight shipment. Multimedia adapter comes with a two-year worldwide limited warranty. Compaq telephone hotline support is available 7 x 24 (terms and conditions vary from region to region).	