

HPE Alletra Storage Server 4110 QuickSpecs

The HPE Alletra Storage Server 4110 provides server-based data infrastructure designed to accelerate data-driven initiatives.

The HPE Alletra Storage Server 4110 is specifically designed to run your most performance demanding data storage-intensive workloads to power your data-driven initiatives to success. From data stores for machine learning (ML) and analytics to distributed and NoSQL databases, performance sensitive Software-Defined Storage, and data heavy hyperconverged infrastructure, it delivers the capabilities you need at ideal economics with trusted security and a cloud operating experience. This includes the option to consume as-a-service via HPE GreenLake enabling you to shift from owning and maintaining to simply utilizing it. HPE Alletra Storage Server 4000 systems provide the data infrastructure for any successful data driven organization.

Overview



HPE Alletra Storage Server 4110 20EDSFF Configure-to-order System



HPE Alletra Storage Server 4110 20SFF Configure-to-order System


Overview



HPE Alletra Storage Server 4110 Configure-to-order System Front View (20EDSFF SKU shown)

Item	Description	Item	Description
1.	Serial number/iLO information pull tab	5.	NIC status LED
2.	iLO service port	6.	UID button/LED
3.	Power On/Standby button and system power LED	7.	USB 3.0 port
4.	Health LED		


Overview

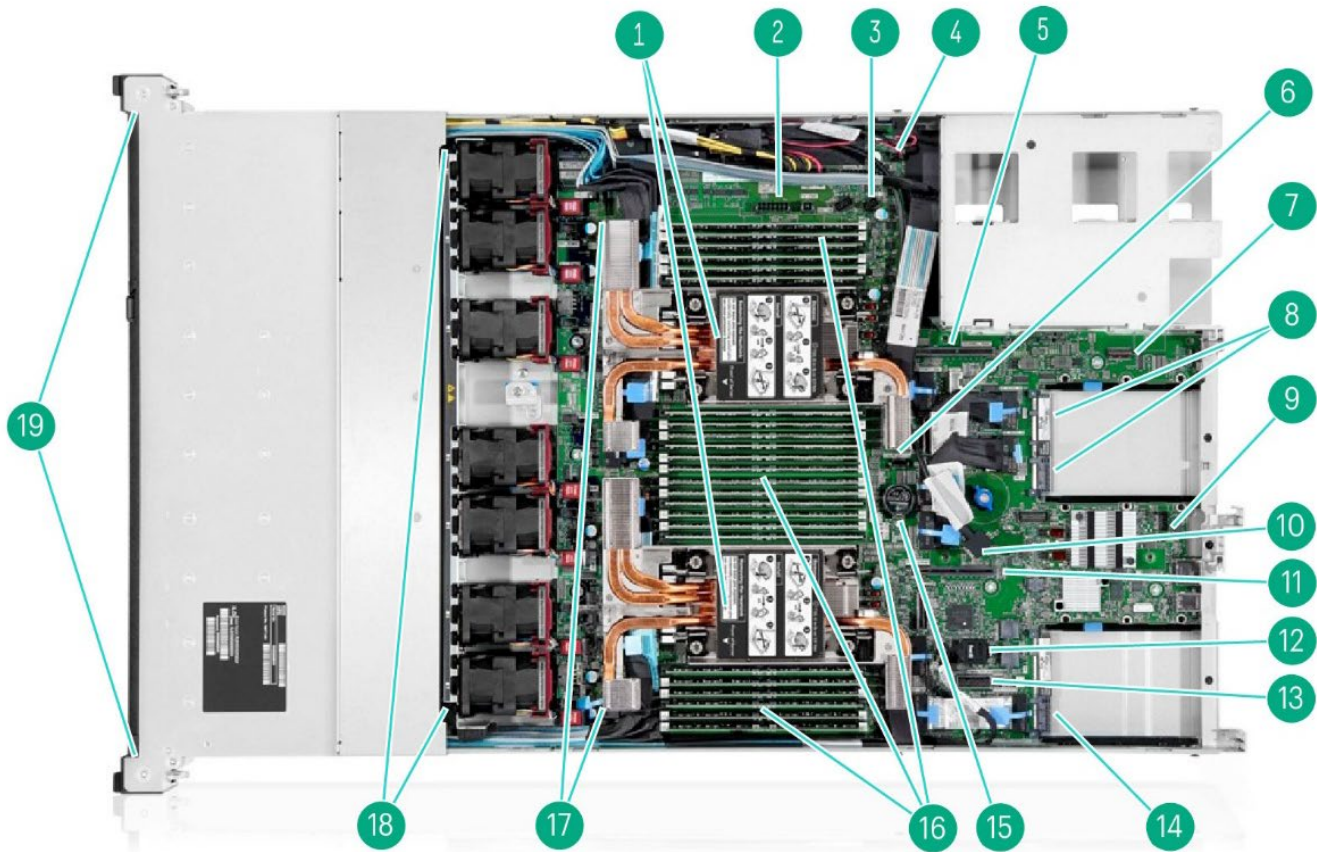

HPE Alletra Storage Server 4110 Configure-to-order System Internal View (20EDSFF SKU shown)

Item	Description	Item	Description
1.	Up to 2 processors (2 processors installed with performance heat sink shown)	11.	Primary riser connector
2.	Energy pack connector	12.	Front I/O connector
3.	Drive cage 2 power connector	13.	PCIe Gen3 connector
4.	Drive cage 1 power connector	14.	OCP1 connector
5.	Secondary riser connector	15.	System battery
6.	Processor Smart Cooling Module connector	16.	DDR5 DIMM slots (Fully populated 24 DIMMs shown)
7.	System maintenance switch	17.	MCIO Connectors
8.	OCP2 A & B connector	18.	System fans
9.	Serial port connector	19.	Drive Cage 1
10.	Internal USB connector		

Overview

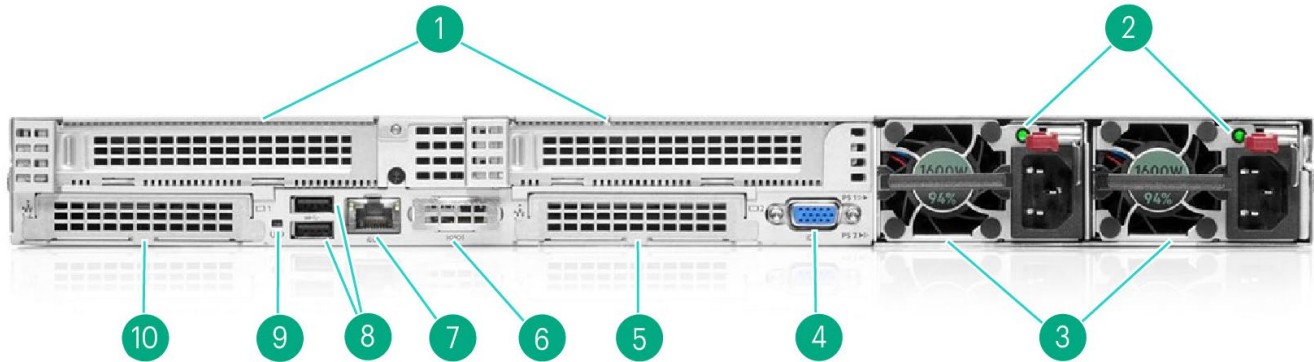

HPE Alletra Storage Server 4110 Configure-to-order System Rear View – Standard for all HPE Alletra Storage Server 4110

Item	Description	Item	Description
1.	PCIe slot 1 & 2	6.	Serial port (optional)
2.	Power supply LED (bay 1 & 2)	7.	iLO management port
3.	Hot-plug power supply bay 1 (standard) & 2 (optional)	8.	USB 3.0 ports
4.	Video port	9.	UID LED
5.	OCP slot (OCP2)	10.	OCP slot (OCP1)

Platform Information

Form Factor

- 1U rack.

Chassis Types

- 20 EDSFF E3.S 1T PCIe Gen5 x4 connected.
- 20 SFF NVMe PCIe Gen4 x4 connected.

System Fans

- 7 hot-pluggable system fan modules shipped as standard.

Notes: Choice of High Performance Fan Kit or Smart Cooling Fan Kit based on the processor selection.

Standard Features

Processors

- always 2 of the following, depending on model.

Notes:

- The 2nd digit of the processor model number “x4xx” is used to denote the processor generation (i.e. 4 = 4th generation).
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Platinum Processors							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Platinum 9468 Processor	2.1 GHz	48	105 MB	350 W	4 @ 16 GT/s	4800 MT/s	512 GB
Platinum 9462 Processor	2.7 GHz	32	75 MB	350 W	3 @ 16 GT/s	4800 MT/s	128 GB
Platinum 9460 Processor	2.2 GHz	40	97.5 MB	350 W	3 @ 16 GT/s	4800 MT/s	128 GB
Platinum 8568Y+ Processor	2.3 GHz	48	300 MB	350 W	4 @ 20 GT/s	5600 MT/s	512 GB
Platinum 8562Y+ Processor	2.8 GHz	32	60 MB	300 W	3 @ 20 GT/s	5600 MT/s	512 GB
Platinum 8558 Processor	2.1 GHz	48	260 MB	330 W	4 @ 20 GT/s	5200 MT/s	512 GB
Platinum 8468 Processor	2.1 GHz	48	105 MB	350 W	4 @ 16 GT/s	4800 MT/s	512 GB
Platinum 8462+ Processor	2.8 GHz	32	60 MB	300 W	3 @ 16 GT/s	4800 MT/s	128 GB
Platinum 8460Y+ Processor	2.0 GHz	40	105 MB	300 W	4 @ 16 GT/s	4800 MT/s	128 GB
Platinum 8452Y Processor	2.0 GHz	36	67.5 MB	300 W	4 @ 16 GT/s	4800 MT/s	128 GB

Notes:

- 2 socket capable, 2S - 4 or 3 UPI @ 20 or 16 GT/s.
- 4th and 5th Generation: 8-Channel DDR5 1DPC @ 5600 - 4800 MT/s.
- 80 lanes PCIe 5.0, advanced RAS.
- Y Supports Intel Speed Select Technology – Performance Profile 2.0 (Intel SST-PP).
- + Feature Plus: Support AMX, DLB, DSA, IAA and QAT additionally.

Gold Processors							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Gold 6554S Processor	2.2 GHz	36	180 MB	270 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6548N Processor	2.8 GHz	32	60 MB	250 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6548Y+ Processor	2.5 GHz	32	60 MB	250 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6544Y Processor	3.6 GHz	16	45 MB	270 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6542Y Processor	2.9 GHz	24	60 MB	250 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6538Y+ Processor	2.2 GHz	32	60 MB	225 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6538N Processor	2.1 GHz	32	60 MB	205 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6534 Processor	3.9 GHz	8	22.5 MB	195 W	3 @ 20 GT/s	4800 MT/s	128 GB
Gold 6530 Processor	2.1 GHz	32	160 MB	270 W	3 @ 20 GT/s	4800 MT/s	128 GB

Standard Features

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Gold 6526 Processor	2.8 GHz	16	37.5 MB	195 W	3 @ 20 GT/s	5200 MT/s	128 GB
Gold 6454S Processor	2.2 GHz	32	60 MB	270 W	4 @ 16 GT/s	4800 MT/s	128 GB
Gold 6448Y Processor	2.1 GHz	32	60 MB	225 W	3 @ 16 GT/s	4800 MT/s	128 GB
Gold 6444Y Processor	3.6 GHz	16	45 MB	270 W	3 @ 16 GT/s	4800 MT/s	128 GB
Gold 6442Y Processor	2.6 GHz	24	60 MB	225 W	3 @ 16 GT/s	4800 MT/s	128 GB
Gold 6438Y+ Processor	2.0 GHz	32	60 MB	205 W	3 @ 16 GT/s	4800 MT/s	128 GB
Gold 6434 Processor	3.7 GHz	8	22.5 MB	195 W	3 @ 16 GT/s	4800 MT/s	128 GB
Gold 6430 Processor	2.1 GHz	32	60 MB	270 W	3 @ 16 GT/s	4400 MT/s	128 GB
Gold 6426Y Processor	2.5 GHz	16	37.5 MB	185 W	3 @ 16 GT/s	4800 MT/s	128 GB
Gold 5520+ Processor	2.2 GHz	28	52.5 MB	205 W	3 @ 20 GT/s	4800 MT/s	128 GB
Gold 5515+ Processor	3.2 GHz	8	22.5 MB	165 W	3 @ 20 GT/s	4800 MT/s	128 GB
Gold 5420+ Processor	2.0 GHz	28	52.5 MB	205 W	3 @ 16 GT/s	4400 MT/s	128 GB
Gold 5418Y Processor	2.0 GHz	24	45 MB	185 W	3 @ 16 GT/s	4400 MT/s	128 GB
Gold 5418N Processor	1.8 GHz	24	45 MB	165 W	3 @ 16 GT/s	4000 MT/s	128 GB
Gold 5416S Processor	2.0 GHz	16	30 MB	150 W	3 @ 16 GT/s	4400 MT/s	128 GB
Gold 5415+ Processor	2.9 GHz	8	22.5 MB	150 W	3 @ 16 GT/s	4400 MT/s	128 GB

Notes:

- 2 socket capable, 2S - 4 or 3 UPI @ 20 or 16 GT/s.
- 4th and 5th Generation: 8-Channel DDR5 1DPC @ 5200 - 4000 MT/s.
- 80 lanes PCIe 5.0, advanced RAS.
- Y Supports Intel Speed Select Technology – Performance Profile 2.0 (Intel SST-PP).
- S SKUs are storage & hyperconverged infrastructure (HCI) optimized SKUs.
- +: Feature Plus: Support AMX, DLB, DSA, IAA and QAT additionally.

Silver Processors

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Silver 4516Y+ Processor	2.2 GHz	24	45 MB	185 W	2 @ 16 GT/s	4400 MT/s	64 GB
Silver 4514Y Processor	2.0 GHz	16	30 MB	150 W	2 @ 16 GT/s	4400 MT/s	64 GB
Silver 4510 Processor	2.4 GHz	12	30 MB	150 W	2 @ 16 GT/s	4400 MT/s	64 GB
Silver 4509Y Processor	2.6 GHz	8	22.5 MB	125 W	2 @ 16 GT/s	4400 MT/s	64 GB
Silver 4416+ Processor	2.0 GHz	20	37.5 MB	165 W	2 @ 16 GT/s	4000 MT/s	64 GB
Silver 4410Y Processor	2.0 GHz	12	30 MB	150 W	2 @ 16 GT/s	4000 MT/s	64 GB

Notes:

- 2 socket capable, 2S - 2 UPI @ 16 GT/s.
- 4th and 5th Generation: 8-Channel DDR5 1DPC @ 4400 - 4000 MT/s.
- 80 lanes PCIe 5.0, advanced RAS.
- Y Supports Intel Speed Select Technology – Performance Profile 2.0 (Intel SST-PP).
- +: Feature Plus: Support AMX, DLB, DSA, IAA and QAT additionally.

Standard Features

Chipset

Intel C741 Chipset.

Notes: For more information regarding Intel® chipsets, please see the following URL:

<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

System Management Chipset

HPE iLO 6 ASIC.

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

Type	HPE DDR5 Smart Memory Registered DIMMs (RDIMMs)
DIMM Slots Available	24 12 DIMM slots per processor, 8 channels per processor, 2-2-1-1 deployment
Maximum capacity (RDIMM)	6 TB 24 x 256 GB RDIMM @ 4800 MT/s 3 TB 24 x 128 GB RDIMM @ 5600 MT/s

Notes:

- The maximum memory speed is limited by the processor selection.
- The maximum capacity per system is limited by the overall configuration selection due to thermal capacity.

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multi-bit error that occurs within a single DRAM chip.

Expansion Slots

Primary Riser

Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
1	PCIe 5.0	x16	x16	CPU 1	Full-height, half-length

Secondary Riser

Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
2	PCIe 5.0	x16	x16	CPU 2	Full-height, half-length

Internal Storage Devices

- **Hard Drives**
None ship standard.

Standard Features

Storage Controllers

- **NVMe Boot Devices**

Optional HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device.

Notes:

- NS204i-u does not occupy a PCIe slot and internal only for Alletra Storage Server 4110.
- 2pcs of 480 GB M.2 NVMe SSD are included in the NS204i-u Hot Plug Boot Device.
- RAID 1 supported on the NS204i-u Hot Plug Boot Device.

Maximum Storage

Storage	Capacity	Configuration
Hot Plug SFF NVMe PCIe SSD	307.2 TB	20 x 15.36 TB
Hot Plug EDSFF NVMe PCIe SSD	307.2 TB	20 x 15.36 TB
NVMe M.2 SSD	3.84 TB	2 x 1.92 TB

Graphics

- Integrated video standard
 - Video modes up to 1920 x 1200 @ 60 Hz (32 bpp)
 - 16 MB Video Memory
- HPE iLO 6 on system management memory
 - 32 MB Flash
 - 4 GBit DDR3 with ECC protection

Power Supply

- HPE 800 W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
- HPE 1000 W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
- HPE 1600 W Flex Slot -48VDC Hot Plug Power Supply Kit
- HPE 1600 W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

Notes:

- Available in 94% efficiency.
 - 1600 W Power supplies only support high line voltage (200 VAC to 240 VAC).
- HPE 1800-2200 W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
- Notes:**
- Available in 96% efficiency.
 - 1800-2200 W Power supplies only support high line voltage (200 VAC to 240 VAC).
 - HPE 1600 W ~48VDC Power Supply Kit.

Standard Features

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOK02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

Interfaces

Serial	1 port – Optional, rear
VGA Port	1 port – Standard, rear
Network Ports	None. Choice of OCP or stand up card, supporting a wide range of NIC adapters
HPE iLO Remote Management Network Port	1 GBE Dedicated
Front iLO Service Port	1 standard
USB 3.0	4 standard on all models: 1 front, 2 rear, 1 internal

Operating Systems and Virtualization Software

- Windows Server 2019
- Windows Server 2022
- Red Hat Enterprise Linux (RHEL) 8.6
- Red Hat Enterprise Linux (RHEL) 9.0
- SUSE Linux Enterprise Server (SLES) 15 SP4
- VMware 7.0 U3
- VMware 8.0
- Canonical Ubuntu 20.04 LTS and 22.04 LTS

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server visit.

<http://www.HPE.com/info/ossupport>

Standard Features

Industry Standard Compliance

- ACPI 6.4 Compliant
- PCIe 5.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.2 Gen1 Compliant
- SMBIOS 3.4
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- TPM 2.0 support
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line (SMASH CLP)
- One Button Secure Erase Enhancements
- UEFI (Unified Extensible Firmware Interface Forum) 2.7

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.HPE.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.HPE.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning.

Learn more at <http://www.HPE.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.HPE.com/info/restfulapi>.

Standard Features

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.HPE.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.HPE.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP).

Learn more at <https://www.HPE.com/us/en/servers/smart-update.html>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9, Gen10 and Gen10 Plus HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.HPE.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.HPE.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.HPE.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell.

Learn more at <http://www.HPE.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.HPE.com/info/oneview>.

Standard Features

HPE Compute Ops Management

HPE is intelligently transforming compute management with a completely new As a Service experience that delivers greater security, simplicity, and efficiency. Discover a completely modernized compute management experience delivered through HPE GreenLake that securely streamlines operations from edge-to-cloud, and automates key lifecycle tasks (onboard, update, manage and monitor HPE servers), bringing the agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface.

HPE Compute Ops Management is built on a unique cloud-native architecture that abstracts, manages and controls HPE servers regardless of physical location. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.HPE.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation
- Common Criteria certification
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates: components are digitally signed and verified.
- Secure Recovery – recover critical firmware to known good state on detection of compromised FW
- Ability to rollback firmware
- Secure erase of NAND
- TPM (Trusted Platform Module)
- Bezel Locking Kit
- Chassis Intrusion detection

HPE Trusted Platform Module

HPE Trusted Platform Module 2.0 is included on pre-configured models and can be enabled and disabled using the BIOS.

Notes: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys.

Standard Features

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Services operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.HPE.com/us/en/search-results.html?page=1&q=servers%20warranty&autocomplete=0>.

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9, Gen10 and Gen10 Plus servers. To learn more visit <http://www.HPE.com/info/oneview>.

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.HPE.com/info/cmu>.

Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

Optional Features

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

- HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.
- HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.
- HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.
- HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance:

<https://h22174.www2.HPE.com/SimplifiedConfig/Welcome#>

Service and Support

HPE Services

No matter where you are in your digital transformation journey, HPE Services deliver expert support across all stages of your digital transformation. HPE Services support your digital transformation goals from planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.HPE.com/services>

Consulting Services

No matter where you are on your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.HPE.com/services/consulting>

HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](#)

Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.HPE.com/services/operational>

HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.HPE.com/services/complecare>

Service and Support

HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI driven, and digitally enables customer experience to move your business forward. HPE Tech Care Service is available on three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential, which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical, which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.HPE.com/services/techcare>

HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

Notes: To review the list of Lifecycle Services available for your product go to:

<https://www.HPE.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

Other Related Services from HPE Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.HPE.com/v2/Getdocument.aspx?docname=5981-9356enw>

Service and Support

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

DC for Hyperscale

Complete Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high-volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.HPE.com/services/training>

Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and services options.

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

Service and Support

How to Purchase Services

- Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:
- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.HPE.com/portal/site/ssc/>

AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience.

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.HPE.com/hpesc/public/home/signin>

Consume IT On Your Terms

[HPE GreenLake](#) edge-to-cloud platform brings the cloud experience directly to your apps and data wherever they are, the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake edge-to-cloud platform accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE" <https://www.HPE.com/us/en/contact-HPE.html>

For more information:

<http://www.HPE.com/services>

Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model.

To ensure valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information

Step 1: Base Configuration (choose one of the following configurable models)

Network Choice (NC) Models

Network Choice models do not include embedded LOM. To enable networking capability please select a validated alternative NIC-OCP or PCIe- from the Core Options section.

CTO Server	HPE Alletra Storage Server 4110 20 EDSFF Configure-to-order System	HPE Alletra Storage Server 4110 20 SFF Configure-to-order System
SKU Number	P51168-B21	P64587-B21
TAA SKU*	P51168-B21#GTA	P64587-B21#GTA
Processor	Not included as standard	
DIMM Slots	24-DIMM slots	
PCIe	PCIe 5.0: 2 slots (2 x16 FHHL)	
Drive Cage - included	20 EDSFF E3.S 1T NVMe PCIe x5 connected	20 SFF NVMe PCIe x4 connected Basic carrier (BC) drive support
Network Controller	Choice of OCP or stand up cards Notes: No embedded networking.	
Fans**	7 Standard Fans Choice of High Performance Fans or Smart Cooling Fan Kit based on the processor selection	
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download), HPE Compute Ops Management (subscription included)	
USB	Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 1 USB 3.0	
Form Factor	1U Rack	
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.	

Notes:

- *HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.
- **Fans should be selected separately depending on the configuration.

Configuration Information

Step 1a: Operating Tracking SKUs (required to choose one of each category)

The OCA options and configuration rules will be different based on the operating tracking SKUs selected.

Inlet Ambient Operating Temperature Configuration Tracking SKUs

Description	SKU
HPE Alletra Storage Server 4XXX 30C Inlet Ambient Operating Temperature Configuration Tracking Notes: for customers' data center with 30C or lower Inlet Ambient Operating Temperature	S2V38AAE
HPE Alletra Storage Server 4XXX 25C Inlet Ambient Operating Temperature Configuration Tracking Notes: for customers' data center with 25C or lower Inlet Ambient Operating Temperature	S2V33AAE

Networking Operating Configuration Tracking SKUs

Description	SKU
HPE Alletra Storage Server 4XXX DAC Networking Operating Configuration Tracking Notes: for customers using Direct Attach Copper (DAC) for the server networking connection	S2V32AAE
HPE Alletra Storage Server 4XXX AOC Networking Operating Configuration Tracking Notes: for customers using Active Optical Cables (AOC) for the server networking connection	S2V37AAE

Step 2: Choose Required Options

Please select two matching processors.

Notes:

- Mixing of 2 different processor models is not supported.
- Processors with TDP equal to or greater than 270 W require Smart Cooling Module Kit (P51171-B21).
- Processors with TDP equal to or greater than 270 W require Smart Cooling Fan Kit (P51675-B21).
- Processors with TDP lower than 270 W require High Performance Heat Sink Kit (P51169-B21).
- Processors with TDP lower than 270 W require High Performance Fan Kit (P51673-B21).

Step 2a: Choose Processor Options

Processor Option Kits

5th Generation Intel Xeon-Platinum

Description	SKU
Intel Xeon-Platinum 8568Y+ 2.3 GHz 48-core 350 W Processor Kit for HPE Alletra Storage Server 41X0	P67405-B21
Intel Xeon-Platinum 8562Y+ 2.8 GHz 32-core 300 W Processor Kit for HPE Alletra Storage Server 41X0	P67408-B21
Intel Xeon-Platinum 8558 2.1 GHz 48-core 330 W Processor Kit for HPE Alletra Storage Server 41X0	P67406-B21

Configuration Information

5th Generation Intel Xeon-Gold

Description

	SKU
Intel Xeon-Gold 6554S 2.2 GHz 36-core 270 W Processor Kit for HPE Alletra Storage Server 41X0	P67407-B21
Intel Xeon-Gold 6548N 2.8 GHz 32-core 250 W Processor for HPE Alletra Storage Server 41X0	P75664-B21
Intel Xeon-Gold 6548Y+ 2.5 GHz 32-core 250 W Processor Kit for HPE Alletra Storage Server 41X0	P67410-B21
Intel Xeon-Gold 6544Y 3.6 GHz 16-core 270 W Processor Kit for HPE Alletra Storage Server 41X0	P67417-B21
Intel Xeon-Gold 6542Y 2.9 GHz 24-core 250 W Processor Kit for HPE Alletra Storage Server 41X0	P67415-B21
Intel Xeon-Gold 6538Y+ 2.2 GHz 32-core 225 W Processor Kit for HPE Alletra Storage Server 41X0	P67409-B21
Intel Xeon-Gold 6538N 2.1 GHz 32-core 205 W Processor Kit for HPE Alletra Storage Server 41X0	P67412-B21
Intel Xeon-Gold 6534 3.9 GHz 8-core 195 W Processor Kit for HPE Alletra Storage Server 41X0	P67401-B21
Intel Xeon-Gold 6530 2.1 GHz 32-core 270 W Processor Kit for HPE Alletra Storage Server 41X0	P67411-B21
Intel Xeon-Gold 6526Y 2.8 GHz 16-core 195 W Processor Kit for HPE Alletra Storage Server 41X0	P67418-B21
Intel Xeon-Gold 5520+ 2.2 GHz 28-core 205 W Processor Kit for HPE Alletra Storage Server 41X0	P67413-B21
Intel Xeon-Gold 5515+ 3.2 GHz 8-core 165 W Processor Kit for HPE Alletra Storage Server 41X0	P67402-B21
Intel Xeon-Gold 5512U 2.1 GHz 28-core 185 W Processor Kit for HPE Alletra Storage Server 41X0	P67414-B21

5th Generation Intel Xeon-Silver

Description

	SKU
Intel Xeon-Silver 4516Y+ 2.2 GHz 24-core 185 W Processor Kit for HPE Alletra Storage Server 41X0	P67416-B21
Intel Xeon-Silver 4514Y 2.0 GHz 16-core 150 W Processor Kit for HPE Alletra Storage Server 41X0	P67419-B21
Intel Xeon-Silver 4510 2.4 GHz 12-core 150 W Processor Kit for HPE Alletra Storage Server 41X0	P67420-B21
Intel Xeon-Silver 4509Y 2.6 GHz 8-core 125 W Processor Kit for HPE Alletra Storage Server 41X0	P67403-B21

4th Generation Intel Xeon-Platinum

Description

	SKU
Intel Xeon-Platinum 9468 2.1 GHz 48-core 350 W Processor Kit for HPE Alletra Storage Server 41X0	P50810-B21
Intel Xeon-Platinum 9462 2.7 GHz 32-core 350 W Processor Kit for HPE Alletra Storage Server 41X0	P50814-B21
Intel Xeon-Platinum 9460 2.2 GHz 40-core 350 W Processor Kit for HPE Alletra Storage Server 41X0	P50815-B21
Intel Xeon-Platinum 8468 2.1 GHz 48-core 350 W Processor Kit for HPE Alletra Storage Server 41X0	P51959-B21
Intel Xeon-Platinum 8462Y+ 2.8 GHz 32-core 300 W Processor Kit for HPE Alletra Storage Server 41X0	P50799-B21
Intel Xeon-Platinum 8460Y+ 2.0 GHz 40-core 300 W Processor Kit for HPE Alletra Storage Server 41X0	P50800-B21
Intel Xeon-Platinum 8452Y 2.0 GHz 36-core 300 W Processor Kit for HPE Alletra Storage Server 41X0	P50807-B21

4th Generation Intel Xeon-Gold

Description

	SKU
Intel Xeon-Gold 6454S 2.2 GHz 32-core 270 W Processor Kit for HPE Alletra Storage Server 41X0	P50809-B21
Intel Xeon-Gold 6448Y 2.1 GHz 32-core 225 W Processor Kit for HPE Alletra Storage Server 41X0	P50796-B21
Intel Xeon-Gold 6444Y 3.6 GHz 16-core 270 W Processor Kit for HPE Alletra Storage Server 41X0	P50798-B21
Intel Xeon-Gold 6442Y 2.6 GHz 24-core 225 W Processor Kit for HPE Alletra Storage Server 41X0	P50795-B21

Configuration Information

Description

	SKU
Intel Xeon-Gold 6438Y+ 2.0 GHz 32-core 205 W Processor Kit for HPE Alletra Storage Server 41X0	P50806-B21
Intel Xeon-Gold 6434 3.7 GHz 8-core 205 W Processor Kit for HPE Alletra Storage Server 41X0	P50797-B21
Intel Xeon-Gold 6430 2.1 GHz 32-core 270 W Processor Kit for HPE Alletra Storage Server 41X0	P50805-B21
Intel Xeon-Gold 6426Y 2.5 GHz 16-core 185 W Processor Kit for HPE Alletra Storage Server 41X0	P50794-B21
Intel Xeon-Gold 5420+ 2.0 GHz 28-core 205 W Processor Kit for HPE Alletra Storage Server 41X0	P50804-B21
Intel Xeon-Gold 5418Y 2.0 GHz 24-core 185 W Processor Kit for HPE Alletra Storage Server 41X0	P50803-B21
Intel Xeon-Gold 5418N 1.8 GHz 24-core 165 W Processor Kit for HPE Alletra Storage Server 41X0	P50816-B21
Intel Xeon-Gold 5416S 2.0 GHz 16-core 150 W Processor Kit for HPE Alletra Storage Server 41X0	P50808-B21
Intel Xeon-Gold 5415+ 2.9 GHz 8-core 150 W Processor Kit for HPE Alletra Storage Server 41X0	P50793-B21

4th Generation Intel Xeon-Silver

Description

	SKU
Intel Xeon-Silver 4416+ 2.0 GHz 20-core 165 W Processor Kit for HPE Alletra Storage Server 41X0	P50802-B21
Intel Xeon-Silver 4410Y 2.0 GHz 12-core 150 W Processor Kit for HPE Alletra Storage Server 41X0	P50801-B21

Step 2b: Choose Memory Options

Please select two or more memory DIMMs from below.

For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).

Notes:

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected per socket must be 0, 1, 2, 4, 6, 8, or 12.
- The 5600 MT/s Memory SKUs are supported for 5th Gen processors only
- The 4800 MT/s Memory SKUs are supported for 4th Gen processors only

Registered DIMMs (RDIMMs)

Notes:

- Mixing of 3DS and non-3DS DIMMs not allowed.
- Rank and capacity mixing of DIMMs is not supported

Description

	SKU
HPE 16 GB (1x16GB) Single Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64705-K21
HPE 32 GB (1x32GB) Dual Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64706-K21
HPE 64 GB (1x64GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64707-K21
HPE 96 GB (1x96GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64708-K21

Notes: Do not support SPR EE LCC SKUs. Do not support quantity 2 or 4 per CPU socket.

HPE 128 GB (1x128GB) Quad Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit	P64709-K21
--	------------

Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.

HPE 128 GB (1x128GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P69976-K21
--	------------

Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.

HPE 16 GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43322-K21
--	------------

Description

HPE 32 GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	SKU P43328-K21
--	--------------------------

Configuration Information

HPE 64 GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43331-K21

Notes: If this SKU and processors equal or greater than 270 W are selected, the maximum drive quantity is 10.

HPE 128 GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit P43334-K21

Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.

HPE 128 GB (1x128GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P69974-K21

Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.

HPE 256 GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit P43337-K21

Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.

Step 2c: Choose Power Supplies

Please select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT supported.

HPE Flex Slot Power Supplies

Description

SKU

HPE 800 W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38995-B21

HPE 1000 W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

HPE 1600 W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38997-B21

Notes: Only supports high line voltage (200 VAC to 240 VAC).

HPE 1800 W -2200 W Flex Slot Titanium Hot Plug Power Supply Kit P44712-B21

Notes: Only supports high line voltage (200 VAC to 240 VAC).

HPE 1600 W Flex Slot -48VDC Hot Plug Power Supply Kit P17023-B21

Step 3: Choose Additional (FIO) Factory Integratable Options

Each of the following may be selected if desired at time of factory integration

Description

SKU

HPE Smart Memory Fast Fault Tolerance FIO Setting 875293-B21

Notes:

- Enables Fast Fault Tolerance mode, an HPE Memory RAS feature introduced in HPE Gen10 servers that survives up to two DRAM failures.
- This RAS feature combines Adaptive Double DRAM Device Correction (ADDC) with HPE Advanced Error Detection Technology, resulting in significantly better memory reliability and availability that what ADDDC provides on its own. For more information see our [Memory RAS feature technical whitepaper](#).

HPE Security Options

HPE Server Security Optimized Service for HPE ProLiant (R9S59A) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a HPE Alletra Storage Server 41X0 CTO system ensures it is hardened by turning on advanced safeguards in place against cyber-exploits throughout the server lifecycle. An iLO Advanced License required for High Security Mode and compatible intrusion detection device option kits are prerequisites for the full optimization service.

Configuration Information

Step 4: Management software

Select your choice of cloud-native management or on-premises management software.

HPE Compute Ops Management for cloud-native management

Notes: HPE Compute Ops Management for cloud-native management of Alletra Storage Servers, as well as ProLiant servers. The SKUs below are for Alletra Storage Servers specifically and are billed upfront. If you want to be billed monthly or annually, please order R6Z73AAE standalone.

Recommended SKU

	SKU
HPE Compute Ops Management Standard 5-year Upfront Alletra 4000 SaaS	S1E13AAE

Alternative SKUs

	SKU
HPE Compute Ops Management Standard 3-year Upfront Alletra 4000 SaaS	S1E12AAE
HPE Compute Ops Management Advanced 3-year Upfront Alletra 4000 SaaS	S5E63AAE
HPE Compute Ops Management Advanced 5-year Upfront Alletra 4000 SaaS	S5E64AAE

Notes: The COM Advanced SKUs also include an iLO Advanced license and support so a standalone iLO Advanced license does not need to be ordered separately.

Required SKU when ordering through GreenLake Flex

	SKU
HPE Compute Ops Management Standard with Alletra 4000 Enablement	S4P39AAE

Notes: Both the tracking SKU above as well as one of the COM SaaS SKUs (S1E12 AAE or S1E13AAE) are needed to allow COM to be included and transacted as part of a GL Flex solution and contracts.

HPE OneView**Description**

	SKU
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

Cooling Options

Description	SKU
HPE Alletra Storage Server 4110 High Performance Heat Sink Kit	P51169-B21
HPE Alletra Storage Server 4110 Smart Cooling FIO Module Kit	P51171-B21
Notes: Required for processors with a TDP equal or greater than 270 W .	
HPE Alletra Storage Server 4110 High Performance Fan Kit	P51673-B21
HPE Alletra Storage Server 4110 Smart Cooling Fan Kit	P51675-B21
Notes: Required for processors with a TDP equal or greater than 270 W .	

Optical Drive Options

Description	SKU
HPE Mobile USB DVD-RW Optical Drive	701498-B21
Notes: This kit is supported on USB 3.0 ports only.	

Security

Description	SKU
HPE Gen11 1U Storage Bezel Kit	P52247-B21
HPE Bezel Lock Kit	875519-B21
Notes: Requires Bezel Kit (P52247-B21).	

HPE Memory

Please select two or more memory DIMMs from below.

For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).

Notes:

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected per socket must be 0, 1, 2, 4, 6, 8, or 12.
- The 5600 MT/s Memory SKUs are supported for 5th Gen processors only
- The 4800 MT/s Memory SKUs are supported for 4th Gen processors only

Additional Options

HPE DDR5 Memory

Registered DIMMs (RDIMMs)

Notes:

- Mixing of 3DS and non-3DS DIMMs not allowed.\
- Rank mixing and capacity mixing of DIMMS is not supported

Description

	SKU
HPE 16 GB (1x16GB) Single Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64705-K21
HPE 32 GB (1x32GB) Dual Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64706-K21
HPE 64 GB (1x64GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64707-K21
HPE 96 GB (1x96GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64708-K21
Notes: Do not support SPR EE LCC SKUs. Do not support quantity 2 or 4 per CPU socket.	
HPE 128 GB (1x128GB) Quad Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit	P64709-K21
Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.	
HPE 128 GB (1x128GB) Quad Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit	P64709-K21
Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.	
HPE 16 GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43322-K21
HPE 32 GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43328-K21
HPE 64 GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43331-K21
Notes: If this SKU and processors equal or greater than 270 W are selected, the maximum drive quantity is 10.	
HPE 128 GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43334-K21
Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.	
HPE 128 GB (1x128GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P69974-K21
Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.	
HPE 256 GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43337-K21
Notes: This SKU cannot be selected if processors equal or greater than 270 W or GPU are selected.	

HPE Boot Device

Description

	SKU
HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device	P48183-B21
Notes: Supported when processors equal or less than 270 W .	
HPE Alletra Storage Server 41X0 Direct Attach NVMe M.2 OS Boot Device	P60350-B21
Notes:	
– No NVMe M.2 SSD included and requires at least one NVMe SSD.	
– Supported when processors equal or less than 270 W .	

HPE 960 GB NVMe Gen4 Mainstream Performance Read Intensive M.2 2280 Self-encrypting PE9010 SSD	P80327-K21
HPE 480 GB NVMe Gen4 Mainstream Performance Read Intensive M.2 2280 PE9010 SSD	P80318-K21
HPE 960 GB NVMe Gen4 Mainstream Performance Read Intensive M.2 2280 PE9010 SSD	P80321-K21
HPE 1.92 TB NVMe Gen4 Mainstream Performance Read Intensive M.2 2280 PE9010 SSD	P80324-K21
HPE 480 GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi-Vendor SSD	P40513-B21

Description

SKU

Additional Options

HPE 960 GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi-Vendor SSD	P40514-B21
HPE 1.92 TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi-Vendor SSD	P40515-B21
HPE Alletra Storage Server 4110 NVMe M.2 Enablement Kit	P51206-B21

Notes: Required when NVMe Boot Device is selected.

HPE Solid State Drives

For SSD selection guidance, please visit <https://ssd.HPE.com/>

Mixed Use – NVMe EDSFF - E3S EC1 EDSFF Solid State Drives

Description	SKU
HPE 3.2 TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61191-K21
HPE 6.4 TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61195-K21
HPE 1.6 TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69241-K21
HPE 3.2 TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69243-K21
HPE 6.4 TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69245-K21
HPE 1.6 TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77262-K21
HPE 3.2 TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77265-K21
HPE 6.4 TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77267-K21

Mixed Use - NVMe EDSFF - E3S EC1 EDSFF Self-Encrypting Solid-State Drives

Description	SKU
HPE 3.2 TB NVMe Gen5 High Performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70669-K21
HPE 6.4 TB NVMe Gen5 High Performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70672-K21
HPE 7.68 TB NVMe Gen5 High Performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70674-K21
HPE 15.36 TB NVMe Gen5 High Performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P79122-K21

Notes:

- For direct attach:
 - Requires TPM 2.0 for Local Key encryption.
 - iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 3.2 TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70399-K21
HPE 6.4 TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70401-K21
HPE 12.8 TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70403-K21

Read Intensive – PCIe/NVMe EDSFF - E3S EC1 EDSFF Solid State Drives

Description	SKU
HPE 3.84 TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57799-K21
HPE 7.68 TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57803-K21
HPE 15.36 TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57807-K21
HPE 3.84 TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61179-K21
HPE 7.68 TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61183-K21
HPE 15.36 TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61187-K21

Additional Options

HPE 3.84 TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70392-K21
HPE 7.68 TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70395-K21
HPE 15.36 TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70397-K21
HPE 1.92 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69234-K21
HPE 3.84 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69237-K21
HPE 7.68 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69239-K21
HPE 15.36 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69546-K21
HPE 1.92 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77269-K21
HPE 7.68 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77273-K21
HPE 15.36 TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77275-K21

Very Read Optimized – PCIe/NVMe EDSFF - E3S EC1 EDSFF Solid State Drives

Description	SKU
HPE 3.84 TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P63930-K21
HPE 7.68 TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P63934-K21
HPE 15.36 TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P63938-K21
HPE 30.72 TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P79065-K21

Read Intensive – PCIe/NVMe U.3 – SFF Basic Carrier Solid State Drives

Description	SKU
HPE 1.92 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-K21
HPE 3.84 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-K21
HPE 7.68 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-K21
HPE 15.36 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-K21
HPE 960 GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi-Vendor SSD	P64842-K21
HPE 1.92 TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi-Vendor SSD	P64844-K21
HPE 3.84 TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi-Vendor SSD	P64846-K21
HPE 7.68 TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi-Vendor SSD	P64848-K21
HPE 1.92 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63829-K21
HPE 3.84 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63833-K21
HPE 7.68 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63837-K21
HPE 15.36 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63841-K21
HPE 7.68 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70434-K21
HPE 15.36 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70436-K21
HPE 7.68 TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500 SSD	P84242-K21
HPE 3.84 TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500 SSD	P84244-K21
HPE 15.36 TB NVMe Gen4 Mainstream Performance Read Intensive BC U.3 Static V2 SPDM Multi-Vendor SSD	P84236-K21
HPE 15.36 TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500b SSD	P84239-K21

Additional Options

Notes:

- For direct attach:
 - Requires TPM 2.0 for Local Key encryption.
 - iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

SED (Self-Encryption Drive)

Description	SKU
HPE 1.92 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61019-K21
HPE 3.84 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61027-K21
HPE 7.68 TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61035-K21

Mixed Use – PCIe/NVMe U.3 – SFF Basic Carrier Solid State Drives

Description	SKU
HPE 1.6 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-K21
HPE 3.2 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-K21
HPE 6.4 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-K21
HPE 800 GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi-Vendor SSD	P64999-K21
HPE 1.6 TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi-Vendor SSD	P65007-K21
HPE 3.2 TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi-Vendor SSD	P65015-K21
HPE 6.4 TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi-Vendor SSD	P65023-K21
HPE 1.6 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63845-K21
HPE 3.2 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63849-K21
HPE 6.4 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63853-K21
HPE 3.2 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70426-K21
HPE 6.4 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70428-K21

Notes:

- For direct attach:
 - Requires TPM 2.0 for Local Key encryption.
 - iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

SED (Self-Encryption Drive)

Description	SKU
HPE 1.6 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61043-K21
HPE 3.2 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61051-K21
HPE 6.4 TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61059-K21

Additional Options

Notes:

- For direct attach:
 - Requires TPM 2.0 for Local Key encryption.
 - iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE Smart IO

HPE Networking

1 Gigabit Ethernet adapters

Description

	SKU
Broadcom BCM5719 Ethernet 1 GB 4-port BASE-T Adapter for HPE	P51178-B21
Intel I350-T4 Ethernet 1 GB 4-port BASE-T Adapter for HPE	P21106-B21

10 Gigabit Ethernet adapters

Description

	SKU
Broadcom BCM57416 Ethernet 10 GB 2-port BASE-T Adapter for HPE	P26253-B21
Broadcom BCM57412 Ethernet 10 GB 2-port SFP+ Adapter for HPE	P26259-B21

25 Gigabit Ethernet adapters

Description

	SKU
Broadcom BCM57504 Ethernet 10/25 GB 4-port SFP28 Adapter for HPE	P26264-B21
Broadcom BCM57414 Ethernet 10/25 GB 2-port SFP28 Adapter for HPE	P26262-B21
NVIDIA Ethernet 10/25 GB 2-port SFP28 NVMe-of Crypto Adapter for HPE	S2A69A
Intel E810-XXVDA2 Ethernet 10/25 GB 2-port SFP28 Adapter for HPE	P08443-B21
Mellanox MCX631102AS-ADAT Ethernet 10/25 GB 2-port SFP28 Adapter for HPE	P42044-B21
Intel E810-XXVDA4 Ethernet 10/25 GB 4-port SFP28 Adapter for HPE	P08458-B21

Notes:

- Cannot be selected when processors equal or greater than 270 W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

100 Gigabit Ethernet adapters

Description

	SKU
Intel E810-CQDA2 Ethernet 100 GB 2-port QSFP28 Adapter for HPE	P21112-B21

Notes:

- Cannot be selected when processors equal or greater than 270 W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

Mellanox MCX623106AS-CDAT Ethernet 100 GB 2-port QSFP56 Adapter for HPE	P25960-B21
---	------------

Notes:

- Cannot be selected when processors equal or greater than 270 W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

200 Gigabit Ethernet adapters

Description

SKU

Additional Options

Notes:

- Cannot be selected when processors equal or greater than 270 W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

OCP Adapters

Description

Broadcom BCM5719 Ethernet 1 GB 4-port BASE-T OCP3 Adapter for HPE **SKU**
P51181-B21

Notes: Cannot be selected when processors equal or greater than 270 W are selected.

Intel I350-T4 Ethernet 1 GB 4-port BASE-T OCP3 Adapter for HPE P08449-B21

Notes: Cannot be selected when processors equal or greater than 270 W are selected.

Broadcom BCM57416 Ethernet 10 GB 2-port BASE-T OCP3 Adapter for HPE P10097-B21

Notes: Cannot be selected when processors equal or greater than 270 W are selected.

Description

Broadcom BCM57412 Ethernet 10 GB 2-port SFP+ OCP3 Adapter for HPE **SKU**
P26256-B21

Notes:

- Must add x16 OCP enablement kit (P36661-B21) if NIC x16 connectivity desired.
- Requires the High Performance Fan Kit (P26477-B21).

Broadcom BCM57414 Ethernet 10/25 GB 2-port SFP28 OCP3 Adapter for HPE P10115-B21

Notes: Cannot be selected when processors equal or greater than 270 W are selected.

Intel E810-CQDA2 Ethernet 100 GB 2-port QSFP28 OCP3 Adapter for HPE P22767-B21

Notes:

- Cannot be selected when processors greater than 205 W are selected.
- Support limited to maximum 64 GB capacity per DIMM
- Support limited to 10 drives per system

Mellanox MCX631432AS-ADAI Ethernet 10/25 GB 2-port SFP28 OCP3 Adapter for HPE P42041-B21

Notes: Cannot be selected when processors equal or greater than 270 W are selected.

HPE OCP Thermal Enhancement Kit P28727-B21

HPE InfiniBand

Notes: Cannot be selected when processors equal or greater than 270 W are selected.

Description

HPE InfiniBand NDR/Ethernet 400 GB 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter **SKU**
P45641-B23

HPE InfiniBand NDR200/Ethernet 200 GB 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter P45642-B22

HPE InfiniBand NDR200/Ethernet 200 GbE 2-port QSFP112 PCIe5 x16 MCX755106AC-HEAT Adapter P65333-B21

Additional Options

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOK02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

HPE Flex Slot Hot-plug Power supplies

Description	SKU
HPE 800 W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21
HPE 1000 W Flex Slot Titanium Hot Plug Power Supply Kit	P03178-B21
HPE 1600 W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38997-B21
Notes: Only supports high line voltage (200 VAC to 240 VAC).	
HPE 1800 W -2200 W Flex Slot Titanium Hot Plug Power Supply Kit	P44712-B21
Notes: Only supports high line voltage (200 VAC to 240 VAC).	
HPE 1600 W Flex Slot -48VDC Hot Plug Power Supply Kit	P17023-B21

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Compute Ops Management

Notes: HPE Compute Ops Management for cloud-native management is available in two tiers: Standard, for managing systems individually, or enhanced for management of multiple systems. Billing frequency is available as upfront, monthly, quarterly, or annual payments.

Description	SKU
HPE Compute Ops Management Standard 3-year Upfront Alletra 4000 SaaS	S1E12AAE
HPE Compute Ops Management Standard 5-year Upfront Alletra 4000 SaaS	S1E13AAE
HPE Compute Ops Management Advanced 3-year Upfront Alletra 4000 SaaS	S5E63AAE
HPE Compute Ops Management Advanced 5-year Upfront Alletra 4000 SaaS	S5E64AAE

Notes: The COM Advanced SKUs also include an iLO Advanced license and support so a standalone iLO Advanced license does not need to be ordered separately.

Additional Options

Embedded Management**HPE iLO Advanced****Description****SKU**

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE

HPE iLO Common Password Setting**Description****SKU**

HPE iLO Common Password FIO Setting	P08040-B21
-------------------------------------	------------

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services.

HPE Converged Infrastructure Management Software**HPE OneView Advanced (with HPE iLO Advanced)****Description****SKU**

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
--	----------

HPE OneView Advanced (without HPE iLO Advanced)**Description****SKU**

HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.HPE.com/us/en/integrated-systems/software.html>
- Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

HPE Security**Description****SKU**

HPE Gen11 1U Storage Bezel Kit	P52247-B21
HPE Bezel Lock Kit	875519-B21

Software RAID

Additional Options

Description

Intel Virtual RAID on CPU Premium FIO Software for HPE

SKU
R7J57A

Notes:

- The Intel® VROC Premium is available for RAID support 0, 1, 5, 10 at the field.
- If Intel® VROC Premium is the primary controller, then the following RAID levels are allowed: 0, 1, 5 (available from RAID FIO settings at HPE factory). Requires selection of NVMe Drives through Direct Attach supported only.
- If Intel® RAID is being selected in a configuration with VROC and internal controller, then Customer Defined RAID Setting (389692-B21) must be selected.

Intel Virtual RAID on CPU Premium E-RTU for HPE

R7J59AAE

Notes: Same as Intel Virtual RAID on CPU Premium FIO Software for HPE (R7J57A) but intended for field deployments.

Intel Virtual RAID on CPU Standard E-RTU for HPE

SOE38AAE

Notes: Same as Intel Virtual RAID on CPU Standard FIO Software for HPE (SOE37A) but intended for field deployments.

Essential RAID Controllers

Description

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller

SKU
804398-B21

Notes: For more information on the HPE Smart Array E208i-p SR Gen10 Controller, please refer to the [QuickSpecs](#)

GPU

Notes:

- There is no Energy Star 3.0 certification with Graphic cards.
- Please contact your HPE representative for the system thermal details

Description

NVIDIA A2 16 GB PCIe Non-CEC Accelerator for HPE

SKU
R9H23C

Notes: PCIe 4.0

NVIDIA L4 24 GB PCIe Accelerator for HPE

S0K89C

HPE Storage Options

Emulex Fibre Channel HBAs

Description

HPE SN1200E 16 GB Single Port Fibre Channel Host Bus Adapter

SKU
Q0L13A
Q0L14A

HPE SN1200E 16 GB Dual Port Fibre Channel Host Bus Adapter

HPE SN1610E 32 GB 1-port Fibre Channel Host Bus Adapter

R2J62A

HPE SN1610E 32 GB 2-port Fibre Channel Host Bus Adapter

R2J63A

HPE SN1700E 64 GB 1-port Fibre Channel Host Bus Adapter

R7N77A

HPE SN1700E 64 GB 2-port Fibre Channel Host Bus Adapter

R7N78A

Additional Options

QLogic Fibre Channel HBAs

Description

	SKU
HPE SN1100Q 16 GB Single Port Fibre Channel Host Bus Adapter	P9D93A
HPE SN1100Q 16 GB Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE SN1610Q 32 GB 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1610Q 32 GB 2-port Fibre Channel Host Bus Adapter	R2E09A
HPE SN1700Q 64 GB 1-port Fibre Channel Host Bus Adapter	R7N86A
HPE SN1700Q 64 GB 2-port Fibre Channel Host Bus Adapter	R7N87A

HPE Rack Options

Rail Kits

Notes:

- HPE rail kits contain telescoping rails which allow for in-rack serviceability.
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations.
- Please refer to your installation instructions for proper tools and number of people to use for any installation.

Description

	SKU
HPE Easy Install Rail 7 Kit	P52339-B21

Notes: Used with 20 SFF model.

HPE DL325 Gen10 Plus Cable Management Arm	P18546-B21
---	------------

Notes: Used with HPE Easy Install Rail 7 Kit (P52339-B21).

HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit	P52341-B21
--	------------

Notes: Used with 20 EDSFF model.

HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit	P26489-B21
--	------------

Notes: Used with HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit (P52341-B21).

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

Additional Options

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE USB and SD Options

Notes: In vSphere 7.0, VMware made changes that impact the use of an SD Card/USB media as a standalone boot device and will be removing support for them after version 7.x.

SD Card/USB media can still be used as a standalone boot option through all 7.x releases via published Customer Advisory [Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).

For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

Description

HPE 32 GB microSD RAID 1 USB Boot Drive

SKU

P21868-B21

HPE Support Services

Installation & Start-up Services

Tech Care

Notes: For a full listing of support services available for this server, please visit <http://www.HPE.com/services>.

Technical Specifications

System Unit

Dimensions (Height x Width x Depth)

- **20 SFF Drives SKU**
 - 4.29 x 43.46 x 84.22 cm
 - 1.69 x 17.11 x 33.16 in
 - **20 EDSFF Drives SKU**
 - 4.29 x 43.46 x 73.27 cm
 - 1.69 x 17.11 x 28.85 in
-

Weight (approximate)

- **20 SFF Drives SKU**
 - Minimum: 11.62 kg (25.62 lb)
 - Maximum: 24.01 kg (52.93 lb)
 - **20 EDSFF Drives SKU**
 - Minimum: 8.84 kg (19.49 lb)
 - Maximum: 19.94 kg (43.96 lb)
-

Input Requirements (per power supply)

Rated Line Voltage

- For 1800-2200 W (Titanium): 200-240 VAC
 - For 1600 W (Platinum): 200-240 VAC
 - For 1000 W (Titanium): 200-240 VAC
 - For 800 W (Platinum): 100-240 VAC
 - For 1600 W (-48VDC): -40 Vdc to -72 Vdc
-

System Inlet Temperature

- **Standard Operating Support**
 - 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
 - System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
 - For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.HPE.com/servers/ashrae>

Technical Specifications

Extended Ambient Operating Support

- For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system require the High Performance Fan Kit (P26477-B21) and are listed at the URL: <http://www.HPE.com/servers/ashrae>
- System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

Non-operating

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity (non-condensing)

Operating

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

Non-operating

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

Operating

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Non-operating

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Emissions Classification (EMC)

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.HPE.com/support/Safety-Compliance-EnterpriseProducts>

Technical Specifications

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Test case	1	3	4	5	6
Idle					
LWAd	5.1 B	5.4 B	5.4 B	5.1 B	5.1 B
LpAm	35 dBA	38 dBA	39 dBA	36 dBA	35 dBA
Test case	1	3	4	5	6
Operating					
LWAd	5.9 B	5.6 B	6.2 B	5.1 B	5.6 B
LpAm	45 dBA	41 dBA	47 dBA	34 dBA	40 dBA

Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers [end-of-life product return, trade-in, and recycling programs](#), in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the [Hewlett Packard Enterprise web site](#). These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
05-Jan-2026	Version 27	Added	Added updated Fibre Channel Host Bus Adapter options (16Gb, 32Gb, 64Gb) under HPE Storage Options. Added new HPE InfiniBand adapters and updated Ethernet adapter descriptions for consistency.
10-Nov-2025	Version 26	Added	New SKUs were added under Read Intensive – PCIe/NVMe U.3: P84239-K21, P84236-K21
13-Oct-2025	Version 25	Changed	Overview section was updated – What’s new information was removed. Configuration Information section was updated – New SKUs were added under Read Intensive – PCIe/NVMe U.3 – SFF Basic Carrier Solid State Drives section.
		Added	P84242-K21, P84244-K21
		Removed	P77050-K21, P77053-K21, P77055-K21, P77057-K21, P77059-K21, P77061-K21, P78914-K21, P78917-K21, P78919-K21, P78921-K21, P77271-K21, P31324-B21
28-Jul-2025	Version 24	Changed	Update survey link.
02-Jun-2025	Version 23	Changed	Configuration Information and Additional Options sections were updated.
05-May-2025	Version 22	Changed	Additional Options section was updated Obsolete SKU removed - E5Y34A / P8B24A
07-Apr-2025	Version 21	Changed	Overview, Standard Features, Configuration Information and Additional Options sections were updated. Obsolete SKU removed - P69543-K21
03-Feb-2025	Version 20	Changed	Additional Options section was updated
06-Jan-2025	Version 19	Changed	Additional Options section was updated Obsolete SKU removed – 7 SKUs
04-Nov-2024	Version 18	Changed	Obsolete SKU removed - P56585-K21
07-Oct-2024	Version 17	Changed	Standard Features, Configuration Information and Additional Options sections were updated.
03-Sep-2024	Version 16	Changed	Standard Features, Configuration Information and Additional Options sections were updated.
15-Jul-2024	Version 15	Changed	Configuration Information and Additional Options sections were updated.
01-Jul-2024	Version 14	Changed	Additional Options section was updated
03-Jun-2024	Version 13	Changed	Additional Options section was updated
06-May-2024	Version 12	Changed	Configuration Information and Additional Options sections were updated.
04-Mar-2024	Version 11	Changed	Configuration Information and Additional Options sections were updated.
05-Feb-2024	Version 10	Changed	Configuration Information section was updated
08-Jan-2024	Version 9	Changed	Configuration Information and Additional Options sections were updated.
14-Dec-2023	Version 8	Changed	Overview, Standard Features, Service and Support, Configuration Information and Additional Options sections were updated.

Summary of Changes

			HPE Services Rebranding
06-Nov-2023	Version 7	Changed	Overview, Standard Features, Configuration Information and Additional Options sections were updated.
07-Aug-2023	Version 6	Changed	Standard Features and Configuration Information sections were updated
10-Jul-2023	Version 5	Changed	Overview, Standard Features and Configuration Information sections were updated
03-Apr-2023	Version 4	Changed	Overview, Standard Features, Configuration Information, Additional Options and Technical Specifications sections were updated.
06-Mar-2023	Version 3	Changed	Configuration Information and Additional Options sections were updated. Add SKU - P44712-B21
06-Feb-2023	Version 2	Changed	Additional Options section was updated Add SKUs - R7N86A and R7N87A
10-Jan-2023	Version 1	New	New QuickSpecs.

[Shape the Future of QuickSpecs - Your Input Matters](#)

[Chat now](#)

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

a50004319enw - 16923 - Worldwide - V27 - 05-January-2026
HEWLETT PACKARD ENTERPRISE
HPE.com

