

# HPE product carbon footprint

## HPE ProLiant DL360 Gen10 Server



Hewlett Packard Enterprise recognizes the imperative to help minimize our environmental footprint and it is a core part of our strategy. This product carbon footprint (PCF) sums up the total greenhouse gas (GHG) emissions generated over this product’s lifecycle. The product lifecycle includes manufacturing, transportation, use, and end of life. [Read more about our approach to the circular economy.](#)

This PCF uses Product Attribute to Impact Algorithm (PAIA) version 1.3.2 for manufacturing and end of life GHG emissions. PAIA is a streamlined lifecycle assessment (LCA) tool developed by the Massachusetts Institute of Technology’s Materials Systems Laboratory. [Read more about the intended uses and limitations of the PAIA model from “PAIA Intended Use” document.](#)

### Product input information

#### [HPE ProLiant DL360 Gen10 Server](#)

**Table 1.** Configuration inputs used to estimate the PCF

Lifecycle stage	Component	Base	Mainstream	Performance
Manufacturing	CPU	1x Intel® Xeon® Silver 8-core	2x Intel Xeon Silver 16-core	2x Intel® Xeon® Gold 24-core
	DRAM	64 GB	256 GB	768 GB
	Network adapter	1	2	3
	Storage controller	1x P408i-a	1x P408i-a	1x P816i-a
	SSD	2x 480 GB SATA RI	6x 800 GB SAS MU	10x 1.6 TB SAS MU
	Power supply	2x 800W Platinum	2x 800W Platinum	2x 800W Platinum
	Product weight	13 kg	15 kg	16 kg
Use	Product lifetime	4 years	4 years	4 years
	PUE	1.55	1.55	1.55
	Yearly energy (TEC)	841 kWh	1671 kWh	2036 kWh

Yearly energy is modeled using the [HPE Power Advisor tool](#) and assumes the server is operated at an average of 30% utilization 24 hours a day and 365 days a year. [Power usage effectiveness \(PUE\)](#) is sourced from [Uptime Institute Global Data Center Survey Results 2022.](#)

## Product carbon footprints


**Table 2.** GHG emissions by product lifecycle stage in kg CO<sub>2</sub>e

Configuration	Country of use	Manufacturing	Transportation	Use	End of life	Total	Std. deviation
Base	Europe	925	91	1366	14	2396	1011
	United States	922	139	1979	13	3053	289
	Japan	931	29	2497	13	3470	321
Mainstream	Europe	1503	98	2714	15	4330	1589
	United States	1540	150	3931	14	5635	771
	Japan	1522	31	4959	15	6527	719
Performance	Europe	1689	105	1689	15	8015	4191
	United States	1684	160	8988	15	10847	635
	Japan	1669	34	11337	16	13055	775

HPE reports the mean value of the carbon footprint estimates with a standard deviation. Due to high customization of HPE servers, the GHG emissions can vary by configuration, country, and utilization.

HPE calculates the transportation and use stage GHG emissions. Transportation uses the 2023 emissions intensity from [GHG Emission Factors Hub](#) combined with the total product packaging weight, shipping mode, and distance traveled. Use stage GHG emissions use the latest emissions intensity from [ember-climate.org](#) at the time of publication.

Figure 1 shows how manufacturing, transportation, use, and end of life contribute to the PCF across different regions.

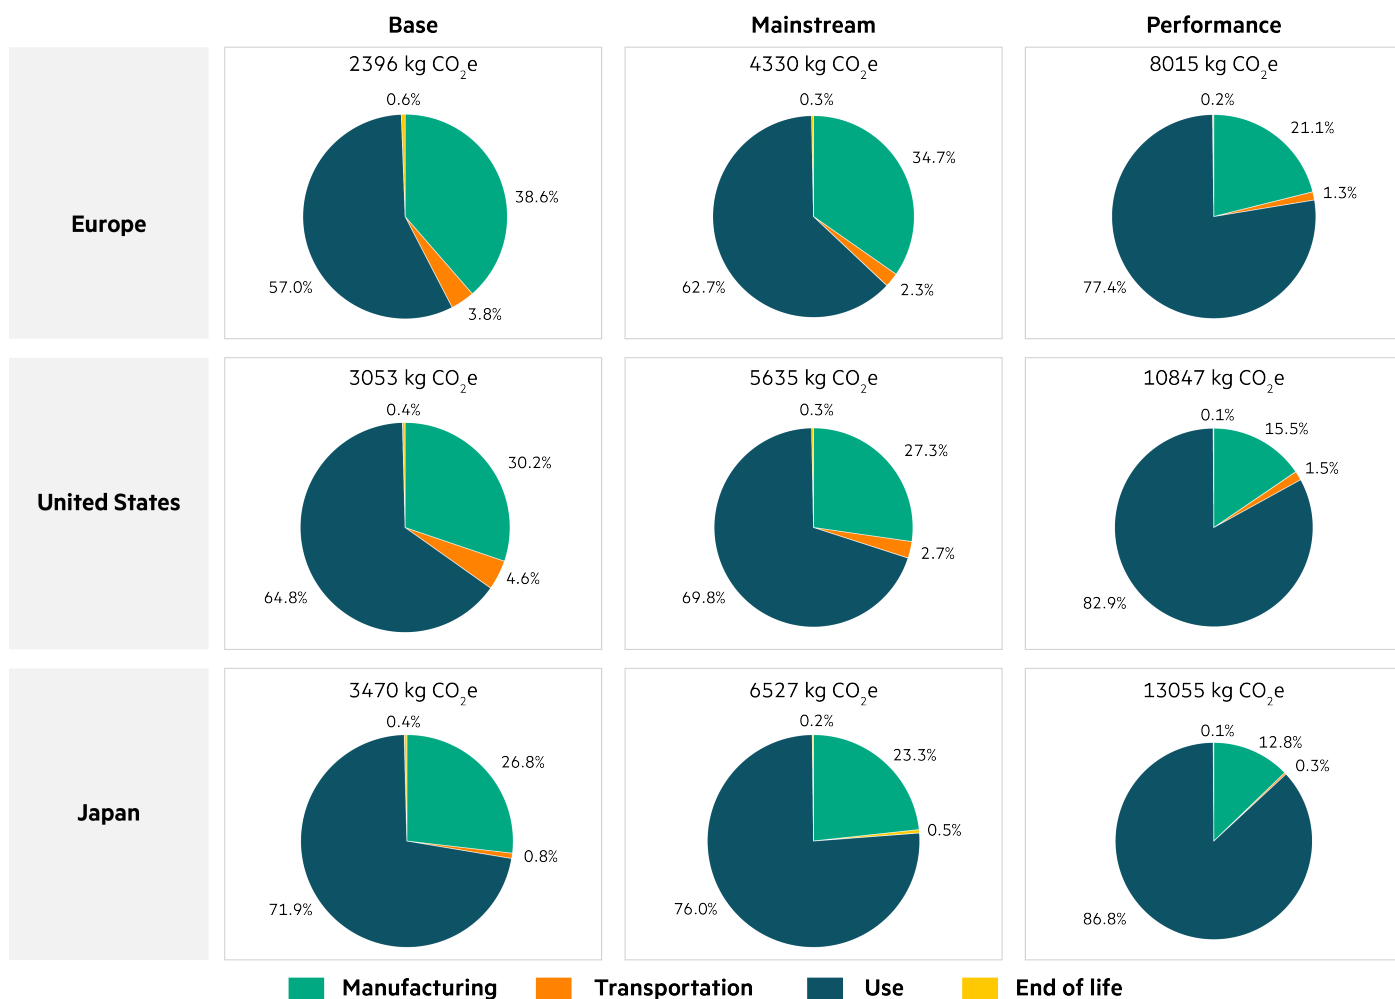

**Figure 1.** PCF calculated by region and type in kg CO<sub>2</sub>e



## How to customize use stage emissions

### Step 1: Collect data

If you know that your server is running from clean energy, the use stage GHG emissions is zero. Otherwise, you can customize the use GHG emissions to a specific grid emissions intensity, server power, power duration, and PUE.

- Grid emissions intensity (grams of CO<sub>2</sub>e per kWh) is collected from a credible source such as your electric provider, [epa.gov/eGRID](https://epa.gov/eGRID), [eea.europa.eu](https://eea.europa.eu), or an aggregation service such as [ember-climate.org](https://ember-climate.org) just to name a few.
- Server power (kW) can be read directly from the server using the HPE iLO and [Redfish API](#) or modeled using the [HPE Power Advisor tool](#) by adjusting the utilization to match the average workload.
- Power duration (hours) is the multiplication of the product lifetime (years), 365 days, 24 hours. The days and hours can be customized to match the specific usage.
- PUE is optional for this calculation based on the LCA scope. PUE is calculated by dividing the total facility energy by the IT equipment energy.

### Step 2: Calculate the emissions

(Use GHG emissions) = (Grid emissions Intensity) x (server power) x (power duration) x (PUE)

For more information about how to use this data or analysis, contact HPE sustainability and IT efficiency technologists at [lpasalesupport@hpe.com](mailto:lpasalesupport@hpe.com).

## Learn more at

[HPE.com/us/en/living-progress.html](https://HPE.com/us/en/living-progress.html)

Visit **HPE GreenLake**

