


Overview

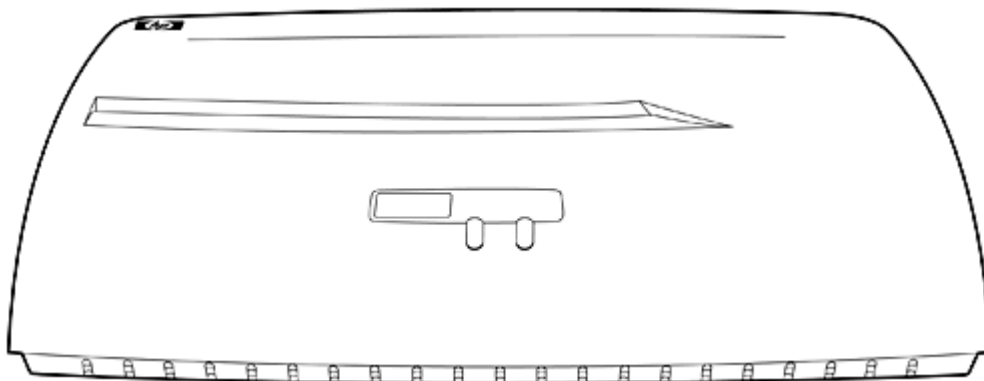

Models

ProCurve Radio Port 230

J9006A

Introduction

The ProCurve Radio Port 230, with simultaneous IEEE 802.11a and IEEE 802.11g wireless operation, works in conjunction with ProCurve Wireless Edge Services xl and zl Modules to deliver advanced wireless services. These services enable a highly secure and resilient wireless LAN that dynamically adapts to the demands of a mobile, multi-service network.

Features and Benefits

Mobility

- **Layer 3 radio port adoption:** Network-wide adoption and auto configuration of ProCurve radio ports enable rapid deployment of a wireless LAN with minimal network reconfiguration. ProCurve radio ports traverse layer 3 networks to locate the designated ProCurve Wireless Edge Services Module using information returned in a DHCP offer or as part of a DNS request. Once adopted by the wireless module, each radio port receives all configuration parameters, including security and BSSID information to enable wireless operation.
- **Layer 2 radio port adoption:** Simply connect each ProCurve radio port to a Power over Ethernet-enabled network port, and the device will be automatically discovered and configured by the ProCurve Wireless Edge Services Module.

Connectivity

- **Simultaneous IEEE 802.11a and IEEE 802.11g radio operation:** supports dual-band wireless clients and provides backward compatibility for IEEE 802.11b wireless devices
- **Per-radio integrated diversity antenna with omnidirectional coverage:** provides robust, dual-radio wireless LAN coverage for open office environments
- **IEEE 802.11h International Telecommunication Union (ITU) compliant:** Dynamic Frequency Selection (DFS) and Transmit Power Control (TPC) are employed to automatically select another channel and adjust transmit power to minimize interference with systems such as radar, if detected on the same channel.
- **International country configuration:** Centrally configured on the ProCurve Wireless Edge Services xl and zl Modules, all ProCurve radio ports automatically adjust to match selected country regulatory requirements.
- **Auto Channel Select (ACS):** helps minimize radio co-channel interference by automatically selecting an unoccupied radio channel
- **Adjustable output power:** controls cell size for high-density access point deployments Resiliency and high availability

Overview

- **Network self-healing:** In the event of a radio port failure, adjacent ProCurve radio ports adjust transmit power and data rates to maintain wireless LAN coverage.
- **RF detection and interference avoidance:** ProCurve radio ports automatically recalibrate channel assignments to avoid environmental or other IEEE 802.11-based wireless interference.

Security

- **Choice of IEEE 802.11i, Wi-Fi Protected Access 2 (WPA2), or WPA:** locks out unauthorized wireless access by authenticating users prior to granting network access; robust Advanced Encryption Standard (AES) or Temporal Key Integrity Protocol (TKIP) encryption secures the data integrity of the wireless traffic
- **IEEE 802.1X client:** enables secure authentication of ProCurve radio ports on network ports protected by 802.1X port-based authentication
- **IEEE 802.1X:** provides port-based user authentication with support for Extensible Authentication Protocol (EAP), TLS, TTLS, PEAP, and SIM, with choice of AES, TKIP, and static or dynamic WEP encryption for protecting wireless traffic between authenticated clients and the access point
- **Web authentication:** provides authentication for browser-based wireless clients. Built-in login, welcome, and failure Web pages assist users through the login process.
- **RADIUS-based MAC authentication:** a wireless client is authenticated with a RADIUS server based on the MAC address of the client; this is useful for clients that have minimal or no user interface
- **MAC address lockout:** prevents configured particular MAC addresses from connecting to the network
- **4 BSSIDs/16 SSIDs per radio:** Multiple wireless broadcast domains with separate security, authentication, and policy configuration per SSID provide access control of network resources based on user authentication and level of trusted security between the wireless user and the network.
- **Neighbor access point (rogue AP) detection:** Each ProCurve radio port simultaneously scans for the presence of other access points while servicing wireless clients. Radio ports can be configured as dedicated RF monitors for continuous monitoring of the RF environment.
- **Inter-station traffic blocking:** prevents communication between client devices associated on the same radio port
- **Closed system:** restricts broadcast of SSID as a security measure to conceal presence of the wireless network

Quality of Service (QoS)

- **Wi-Fi WMM support:** provides QoS functionality in wireless networks by prioritizing wireless traffic from different applications
- **SpectraLink voice priority (SVP) support:** prioritizes SpectraLink voice IP packets sent from a SpectraLink NetLink SVP server to SpectraLink wireless voice handsets to help ensure excellent voice quality
- **Unscheduled Automatic Power Save Delivery (uAPSD):** extends the battery life for Wi-Fi devices such as VoWLAN handsets

Industry-leading warranty

- **Lifetime warranty:** for as long as you own the product, with next-business-day advance replacement (available in most countries)

Services

3-year, 4-hour onsite, 13x5 coverage for hardware	UD542E
3-year, 4-hour onsite, 24x7 coverage for hardware	UD543E
3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support	UD544E
3-year, 24x7 SW phone support, software updates	UF794E

Technical Specifications

Ports	1 auto-sensing 10/100 port (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX); Media Type: ProCurve Auto-MDIX; Duplex: half or full			
Physical characteristics	Dimensions	6.9(d) x 9.8(w) x 1.67(h) in. (17.53 x 24.89 x 4.24 cm)		
	Weight	1.3 lb. (0.59 kg)		
Mounting	Ceiling mount to suspended ceiling T-bar or wall mount			
Environment	Operating	Temperature	32°F to 104°F (0°C to 40°C)	
		Relative humidity	5% to 95%, non-condensing	
	Non-operating/Storage	Temperature	-40°F to 158°F (-40°C to 70°C)	
		Relative humidity	5% to 95%, non-condensing	
	Altitude	up to 10000 ft. (3 km)		
Electrical characteristics	Description	Voltage: 48 VDC (PoE)		
	Maximum heat dissipation	24 BTU/hr (25 kJ/hr)		
	Current	0.148 A		
	Power consumption	7 W		
Safety	UL 60950-1; CAN/CSA 22.2 No. 60950-1; IEC 60950-1; EN 60950-1			
Emissions	EN 60601-1-2; EN 301 489-1; EN 301 489-17; FCC Part 15.107; FCC Part 15.109; ICES-003 (Canada)			
RF exposure	FCC Bulletin OET-65C; IEEE C95.1; RSS-102			
Radio	FCC Part 15.247; FCC Part 15.407 (US); RSS-210 (Canada); EN 300 328; EN 301 893 (Europe); ARIB STD-T66; ARIB STD-T71; ARIB STD-33			
Frequency band and operating channels	United States	2.412 - 2.462 GHz (11 channels)	5.150 - 5.250 GHz (4 channels)	5.725 - 5.825 GHz (4 channels)
	European Union	2.412 - 2.472 GHz (13 channels)	5.150 - 5.350 GHz (8 channels)	5.470 - 5.725 GHz (11 channels)
	Japan	2.412 - 2.484 GHz (14 channels)	5.150 - 5.350 GHz (8 channels)	
	China	2.412 - 2.472 GHz (13 channels)	5.725 - 5.825 GHz (4 channels)	
	Singapore	2.412 - 2.472 GHz (13 channels)	5.150 - 5.350 GHz (8 channels)	5.725 - 5.825 GHz (4 channels)
	Taiwan	2.412 - 2.462 GHz (11 channels)	5.250 - 5.350 GHz (4 channels)	5.725 - 5.825 GHz (4 channels)
	Canada	2.412 - 2.462 GHz (11 channels)	5.150 - 5.350 GHz (8 channels)	5.725 - 5.825 GHz (4 channels)

Technical Specifications

Radio characteristics	IEEE 802.11b			
Maximum transmit power	17.5 dBm (EIRP)			
Data rate	11 Mbps	5.5 Mbps	2 Mbps	1 Mbps
Receiver sensitivity	-84 dBm	-87 dBm	-88 dBm	-90 dBm
Transmit power	17.5 dBm	17.5 dBm	17.5 dBm	17.5 dBm
Radio characteristics	IEEE 802.11g			
Data rate	54 Mbps	48 Mbps	36 Mbps	24 Mbps
Receiver sensitivity	-68 dBm	-70 dBm	-75 dBm	-79 dBm
Transmit power	12.5 dBm	12.5 dBm	14 dBm	14 dBm
Data rate	18 Mbps	12 Mbps	9 Mbps	6 Mbps
Receiver sensitivity	-81 dBm	-85 dBm	-87 dBm	-88 dBm
Transmit power	16.5 dBm	16.5 dBm	17 dBm	17 dBm
Radio characteristics	IEEE 802.11a			
Data rate	54 Mbps	48 Mbps	36 Mbps	24 Mbps
Receiver sensitivity	-68 dBm	-70 dBm	-75 dBm	-79 dBm
Transmit power	12 dBm	12 dBm	14 dBm	14 dBm
Data rate	18 Mbps	12 Mbps	9 Mbps	6 Mbps
Receiver sensitivity	-81 dBm	-85 dBm	-87 dBm	-88 dBm
Transmit power	16 dBm	16 dBm	17.5 dBm	17.5 dBm

© 2007 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services.

Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

To learn more, visit www.procurve.com
 Information is subject to change without notice